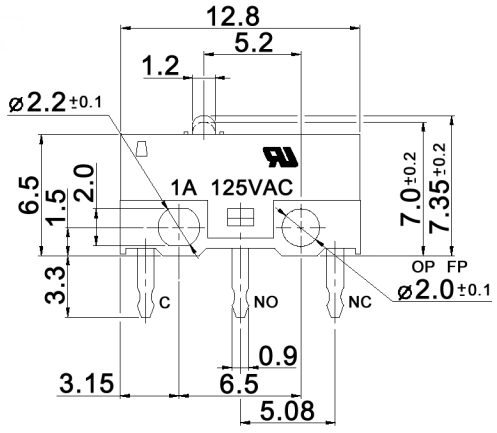

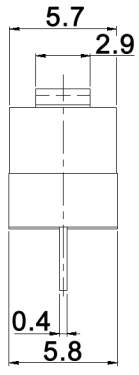

SCHEMATIC



Specifications:

Contact rating:	1A, 125V AC / 30mA, 5V DC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC for 1 minute
Operating temperature:	-25°C to +65°C
Mechanical life:	1 000 000 cycles
Electrical life:	10 000 cycles
Operating force:	130 +/-30gf
Material:	Base / button: PBT, white
	Case: PBT, black
	Spring plate: C1720
	Contact: silver, gold plated
	Terminal: copper alloy

RoHS-conform 2002/95/EC

Tolerances: ±0.2mm			Date	Name	DM-DMG-00P-130	
			04/10	dr		
			knitter-switch		30 20 72	Page 1/1
Modifications	Date	Name				