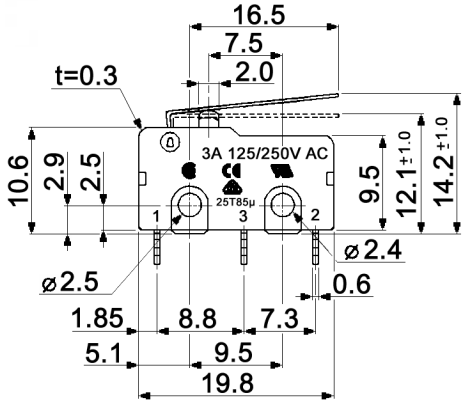



SCHEMATIC



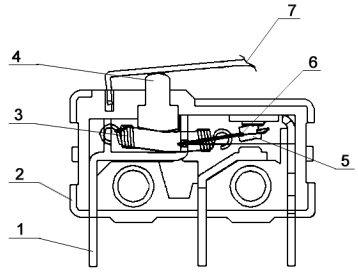



Specifications:

Contact rating:	3A, 125 / 250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	1000V AC for 1 minute
Operating temperature:	-40°C to +85°C
Mechanical life:	100 000 cycles
Electrical life:	10 000 cycles
Operating force:	38 +/-20gf
Material:	1 - Terminal: C2680
	2 - Lower housing: PBT, black
	3 - Spring: SUS304
	4 - Button: PBT, black
	5 - Contact: silver plated alloy
	6 - Change plate: C5210
	7 - Lever: SUS301
	8 - Upper housing: PBT, black

RoHS-conform 2002/95/EC

Tolerances: 0.00 to 30.00: ±0.20mm 30.01 to 80.00: ±0.25mm			Date 03/08	Name dr	DM-SM02-C07
			knitter-switch	30 14 08	Page 1/1
Operating temperature	09/10	dr			
Modifications	Date	Name			