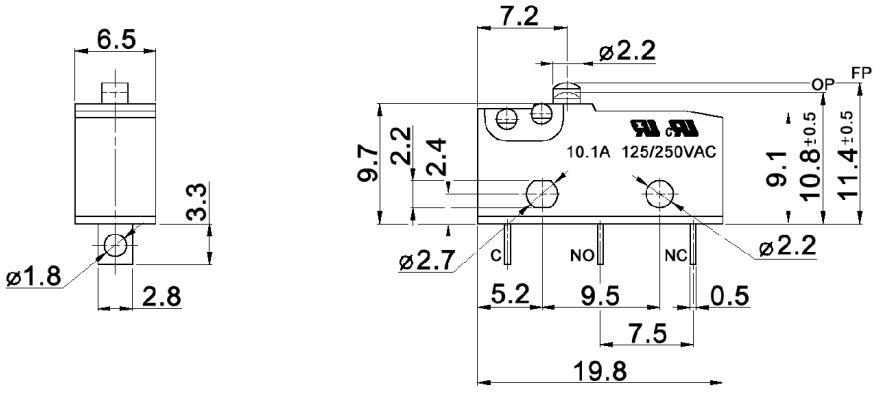

SCHEMATIC



Specifications:

Contact rating:	10.1A, 125/250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	1 000V AC for 1 minute
Operating temperature:	-40°C to +85°C
Mechanical life:	1 000 000 cycles
Electrical life:	6 000 cycles
Operating force:	250 +/50gf

Tolerances: ±0.2mm			Date	Name	DM-SM10-00N-250
			07/10	dr	
			knitter-switch	30 21 29	Page
Operating temperature	08/10	dr			1/1
Modifications	Date	Name			