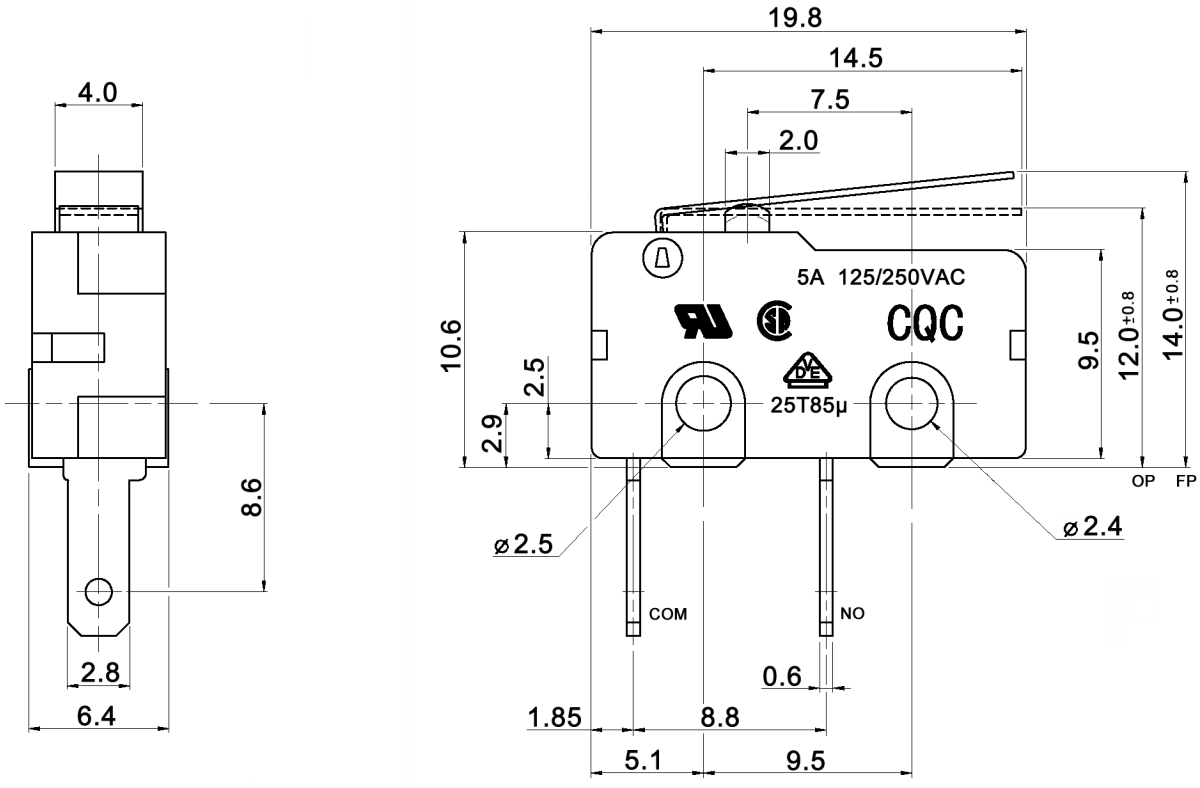

SCHEMATIC



Specifications:

Contact rating:	5A, 125/250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	1 000V AC for 1 minute
Operating temperature:	-40°C to +85°C
Mechanical life:	1 000 000 cycles
Electrical life:	10 000 cycles
Operating force:	17 +/-8gf
Material:	Terminal: copper alloy
	Housing /button: PBT, black
	Spring: SUS304
	Contact: silver alloy, gold plated
	Change plate: SUS301

RoHS-conform 2002/95/EC

Tolerances: ±0.2mm			Date	Name	DM-SM5-01LG-17S-2	
			03/10	dr		
Operating temperature	03/10	dr	knitter-switch		30 20 52	Page 1/1
Modifications	Date	Name				