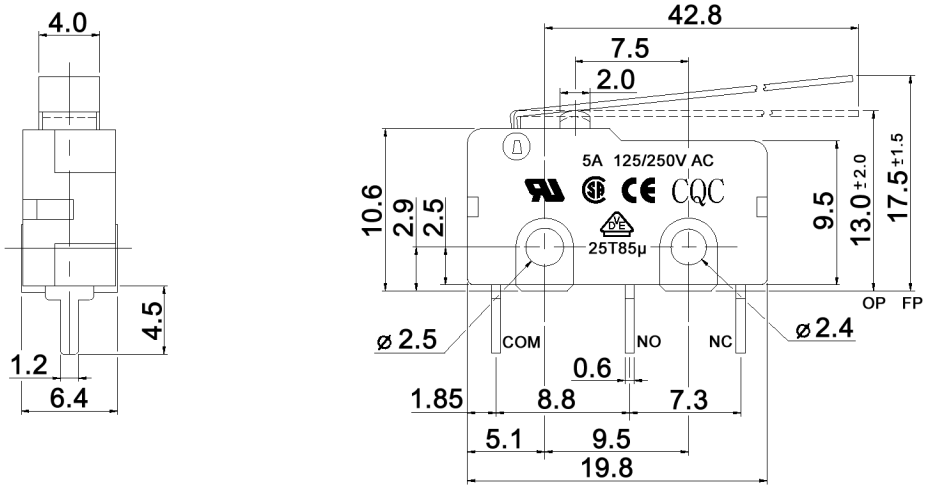

SCHEMATIC



Specifications:

Contact rating:	5A, 125/250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	1 000V AC for 1 minute
Operating temperature:	-40°C to +85°C
Mechanical life:	100 000 cycles
Electrical life:	10 000 cycles
Operating force:	16 +/-8gf
Soldering conditions:	hand-soldering: 350-360°C, 3 sec.
Material:	Terminal: brass
	Housing / button: PBT, black
	Spring: stainless steel
	Contact: silver alloy
	Change plate: phosphor bronze
	Lever: stainless steel

RoHS-conform 2002/95/EC

Tolerances: ±0.2mm			Date	Name	DM-SM5-07P-16S-C5
			01/09	dr	
			knitter-switch	30 16 93	Page
Operating temperature	09/10	dr			1/1
Modifications	Date	Name			