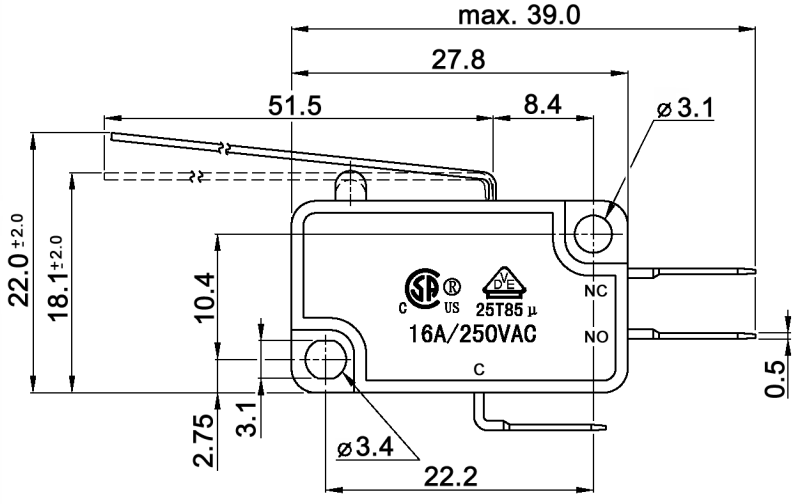

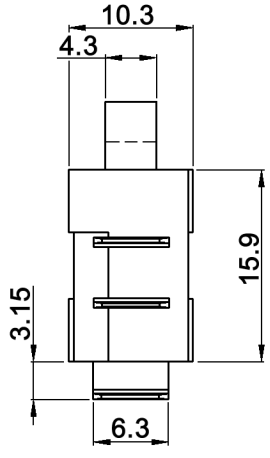

SCHEMATIC



Specifications:

Contact rating:	16A, 250V AC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	1 500V AC for 1 minute
Operating temperature:	-15°C to +70°C
Mechanical life:	100 000 cycles
Electrical life:	10 000 cycles
Operating force:	60 +/-25gf

RoHS-conform 2002/95/EC

Tolerances: ±0.2mm			Date	Name	DM-VM16-03N-60-V16
			06/08	dr	
Modifications	Date	Name	knitter-switch	30 14 99	Page 1/1