
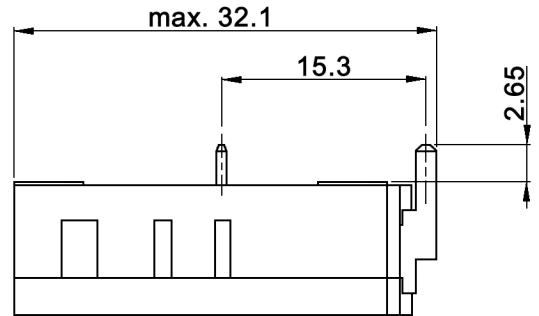



**P.C. MOUNTING**

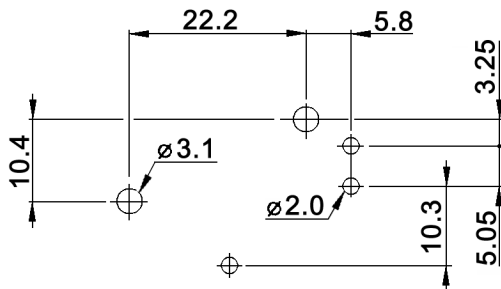

**Specifications:**

- Contact rating: 15A, 125/250V AC
- Contact resistance: 100mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 1 500V AC for 1 minute
- Operating temperature: -25°C to +85°C
- Mechanical life: 1 000 000 cycles
- Electrical life: 10 000 cycles
- Operating force: 100 +/-30gf
- Material:
  - Housing: PBT, black
  - Button: PBT, grey
  - Fixed rod / change plate: copper alloy
  - Spring plate: phosphor bronze
  - Terminal: copper alloy
  - Contact: silver alloy

**SCHEMATIC**



Tolerances: ±0.2mm	Date	Name
	07/10	dr

**DM-VMS15-00L-100**

**knitter-switch**

**30 21 41**

Page

1/1

Modifications	Date	Name
---------------	------	------