


**SWITCH FUNCTION**

Model No.	POS. 1	POS. 2
DPW 1 CG	OFF	MOM
Term. Comm.	OPEN	SHORT

**RUBBER WASHER**

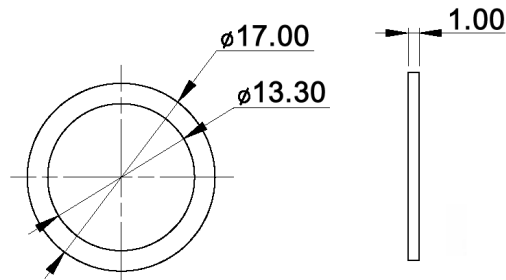

**Specifications:**

- Contact rating: max.: 400mA, 32V AC; 100mA, 50V DC; 125mA, 125V AC
- Contact resistance: 50mOhm max.
- Insulation resistance: 1GOhm min. at 500V DC
- Dielectric strength: 1 000V AC
- Operating temperature: -30°C to +85°C
- Mechanical life: 1 000 000 cycles
- Electrical life: 500 000 cycles
- Operating force: 3N +/-1N
- Soldering conditions: 350°C max., 3sec.
- Travel: 1.5mm
- Panel thickness: 0.8mm min.; 1.8mm max.
- Water proofing: IP 67
- Material: Case: DAP UL94V-0  
Bushing / cap: polyamide 6/6  
Terminal / contact: gold over silver plated

X=CAP COLOR	
W	white
K	black
R	red
O	orange
Y	yellow
G	green
B	blue



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm		Date	Name
		08/07	dr
Rubber washer	06/10	dr	
Actuator color black	06/08	dr	
Operating temperature	04/08	dr	
Water proofing	03/08	dr	
Modifications	Date	Name	

**DPW 1 CG S-x**

**knitter-switch**

**30 12 19**

Page

1/1