



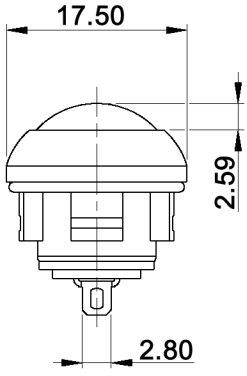

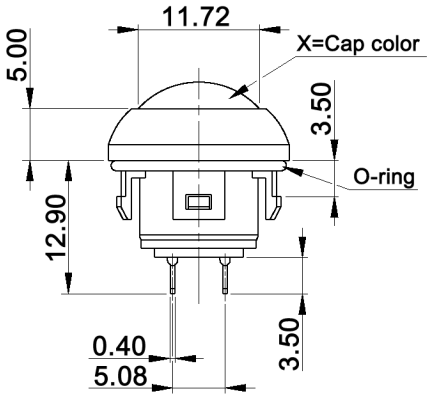

O-RING

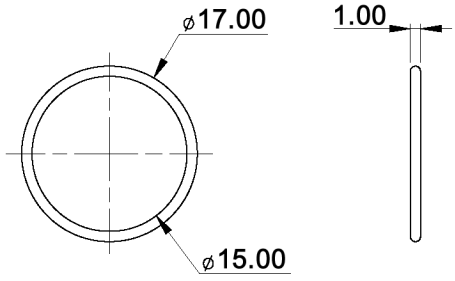

SWITCH FUNCTION

Model No.	POS. 1	POS. 2
DPW 11 CG	OFF	MOM
Term. Conn.	OPEN	SHORT

PANEL CUT-OUT



Specifications:

Contact rating:	max.: 400mA, 32V AC; 100mA, 50V DC; 125mA, 125V AC
Contact resistance:	50mOhm max.
Insulation resistance:	1GOhm min. at 500V DC
Dielectric strength:	1 000V AC RMS
Operating temperature:	-30°C to +85°C
Mechanical life:	1 000 000 cycles
Electrical life:	500 000 cycles at full load
Operating force:	3.5 +/-1.5N
Soldering conditions:	350°C max., 5sec.
Travel:	1.5mm
Panel thickness:	3.0 +/-0.25mm
Water proofing:	IP67
Material:	Case: diallyl phthalate (DAP) (UL94V-0) Bushing / cap: polyamide 6/6 Terminal / contacts: gold over silver plated

X=CAP COLOR	
W	white
K	black
R	red
O	orange
Y	yellow
G	green
B	blue

RoHS-conform 2002/95/EC

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date 04/08	Name dr	DPW 11 CG-Sx
			knitter-switch	30 14 75	Page 1/1
Actuator color black	06/08	dr			
Modifications	Date	Name			