


P.C.B. LAYOUT



Specifications:

- Contact rating: switching: 25mA, 24V DC  
 non-switching: 100mA  
 Contact resistance: 100mOhm max.  
 Insulation resistance: 1 000MOhm min. at 100V DC  
 Dielectric strength: 250V AC, 50Hz for the duration of 1 minute  
 Operating temperature: -25°C to +70°C  
 Storage temperature: -40°C to +85°C  
 Mechanical life: 2 000 cycles  
 Soldering conditions: 230 +/-5°C, 5 +/-5sec.  
 Switching function: BCD 16 real code  
 Construction: washable  
 Material: Terminals: tin plated over nickel

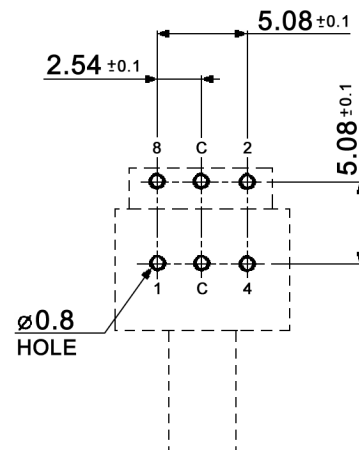

|                |       |      |
|----------------|-------|------|
| Tolerances:    | Date  | Name |
|                | 11/03 | us   |
|                |       |      |
|                |       |      |
|                |       |      |
|                |       |      |
| RoHS compliant | 03/09 | dr   |
| Modifications  | Date  | Name |

**DRR 21016**

**30 04 07**

Page

1/1