



P.C.B. LAYOUT

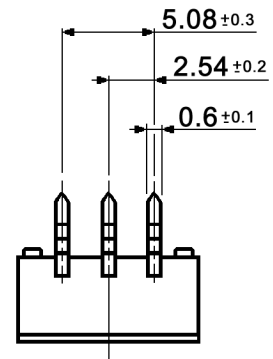

Specifications:

- Contact rating: switching: 25mA, 24V DC
non-switching: 100mA
- Contact resistance: 100mOhm max.
- Insulation resistance: 1 000MOhm min. at 100V DC
- Dielectric strength: 250V AC, 50Hz for the duration of 1 minute
- Operating temperature: -25°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: 230 +/-5°C, 5 +/-0.5sec.
- Switching function: BCD 16 real code
- Construction: washable
- Material: Terminals: tin plated over nickel

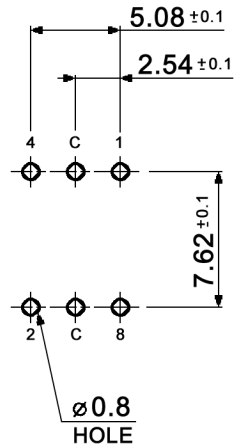

Tolerances:	Date	Name
	11/03	us
Revised	05/11	dr
Dimension	08/09	dr
Modifications	Date	Name

DRS 20016

30 04 04

Page
1/1

knitter-switch