



P.C.B. LAYOUT

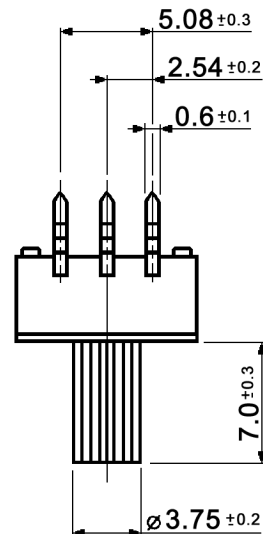

Specifications:

- Contact rating: switching: 25mA, 24V DC  
non-switching: 100mA
- Contact resistance: 100mOhm max.
- Insulation resistance: 1 000MOhm min. at 100V DC
- Dielectric strength: 250V AC, 50Hz for the duration of 1 minute
- Operating temperature: -25°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: 230 +/-5°C, 5 +/-0.5sec.
- Switching function: hexadecimal inverse
- Construction: washable
- Material: Terminals: tin plated over nickel

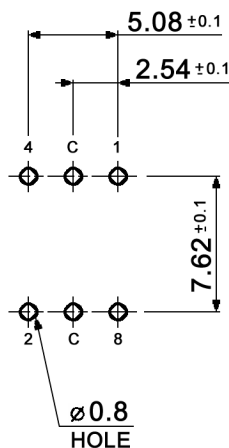

Tolerances:			Date	Name	<h1>DRS 21016</h1>
			11/03	us	
			<b>knitter-switch</b>		<h1>30 03 99</h1>
Revised	05/11	dr			Page 1/1
Modifications	Date	Name			