

OUTPUT CODE


		Nr. OF POSITION															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CODE	1		●	●			●	●			●	●				●	●
	2			●	●	●	●					●	●	●	●		
	3					●	●	●	●	●	●	●	●	●			
	4									●	●	●	●	●	●	●	●

Specifications:

Contact rating: 0.3A, 16V DC max.
 Contact resistance: 50mOhm max. at 1A, 5V DC
 Insulation resistance: 100MOhm min. at 250V DC
 Dielectric strength: 500V DC for 1 minute
 Operating temperature: -25°C to +85°C
 Mechanical life: 10 000 cycles
 Operating force: 700 +/-300gf.cm
 Soldering conditions: 230 +/-5°C, 3 +/-0.5sec.
 Circuit: 1 pole, 16 positions



P.C.B. MOUNTING

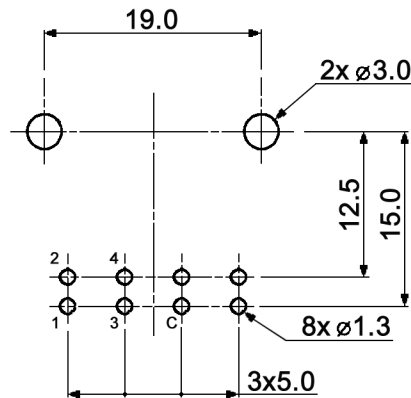

Tolerances: under to 10: ±0.3mm over 10 to 100: ±0.5mm		Date	Name	<h1>DRSV 20-116 F25-5</h1>
		04/09	dr	
		knitter-switch		<h2>30 17 96</h2>
Modifications		Date	Name	Page 1/1