
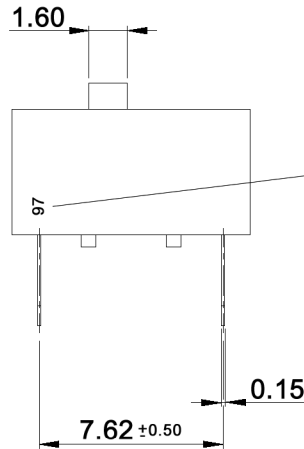


No. of pos.	A	B
1	3.90	-
2	6.44	2.54
3	8.98	5.08
4	11.52	7.62
5	14.06	10.16
6	16.60	12.70
7	19.14	15.24
8	21.68	17.78
9	24.22	20.32
10	26.76	22.86
12	31.84	27.94

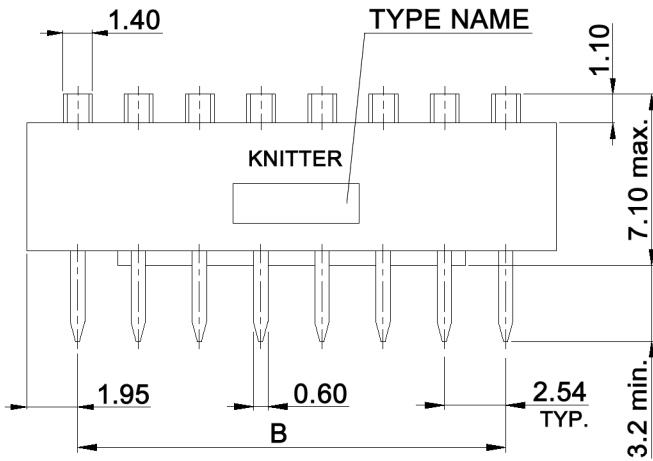

DATE CODE

First digit:
last digit of the year

Second digit:

- 1 January
- 2 February
- 3 March
- 4 April
- 5 May
- 6 June
- 7 July
- 8 August
- 9 September
- X October
- Y November
- Z December

SCHEMATIC




(2, 3, 4, 5, 6, 7, 8, 9, 10, 12, POS AVAIL)

Specifications:

- Contact rating: 100mA, 50V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Electrical life: 10 000 cycles per switch 25mA, 24V DC
- Operating force: 1 000gf max.
- Soldering conditions: wave-soldering: 260°C, max. 5sec.
- Stroke: 2.0mm
- Material: Actuator: UL94V-0 high-thermoplastic; white
Contacts / terminals: phosphor bronze, 1.25µm gold plated over 1µm nickel
Case: PBT, UL94V-0, black
Potting material: epoxy

P.C.B. LAYOUT

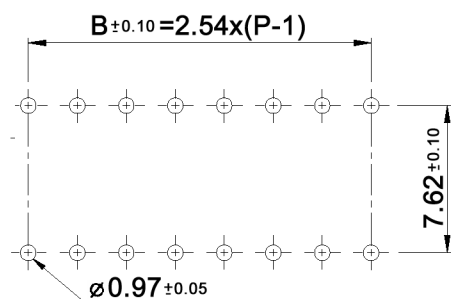

Tolerances: ±0.20mm	Date	Name	04/09	dr
Operat. temperature	11/09	dr		
Packaging unit	10/09	dr		
Print	08/09	dr		
Specifications	06/09	dr		
Modifications	Date	Name		

DSS 100 N

knitter-switch


30 17 73

Page



1/2

Packaging:

DSS 101 N - DSS 103 N:

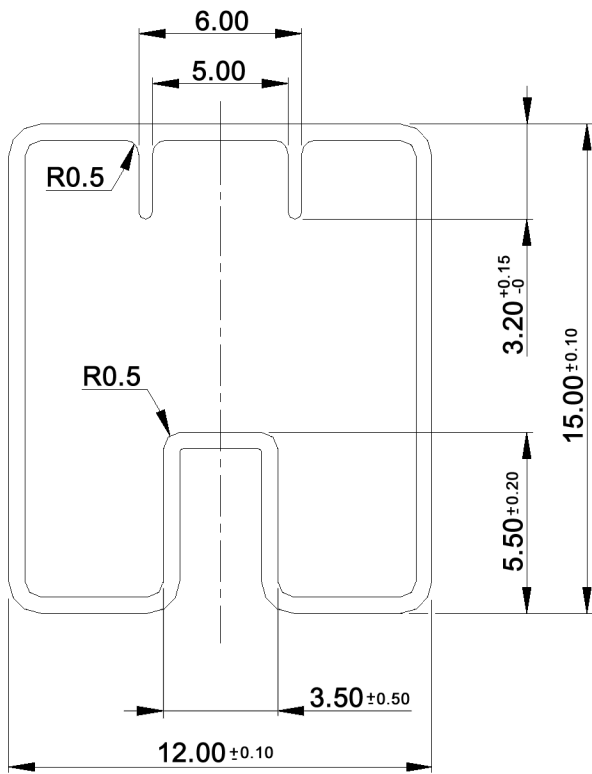

DSS 104 N - DSS 112 N:

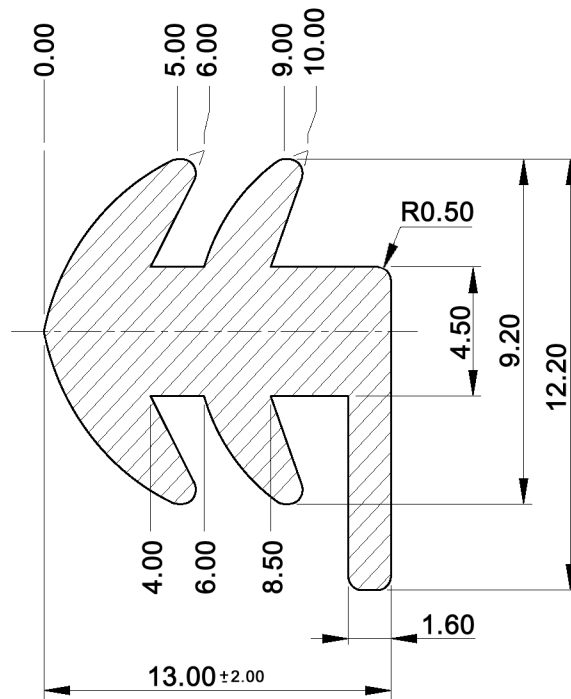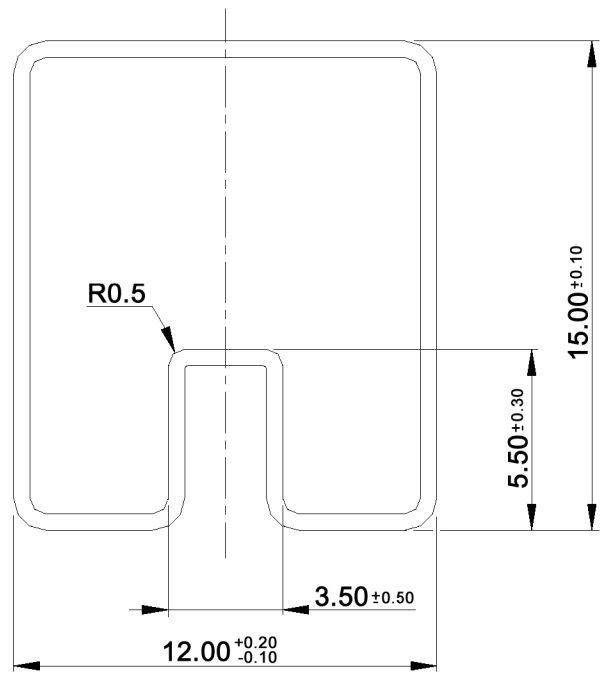

Pole	Quantity per tube
1	120
2	72
3	51
4	40
5	32
6	27
7	24
8	21
9	19
10	17
12	14



Tolerances: ±0.20mm			Date	Name
			04/09	dr
Modifications	Date	Name		

DSS 100 N

30 17 73