



No. of pos.	A	B
1	3.90	-
2	6.44	2.54
3	8.98	5.08
4	11.52	7.62
5	14.06	10.16
6	16.60	12.70
7	19.14	15.24
8	21.68	17.78
9	24.22	20.32
10	26.76	22.86
12	31.84	27.94

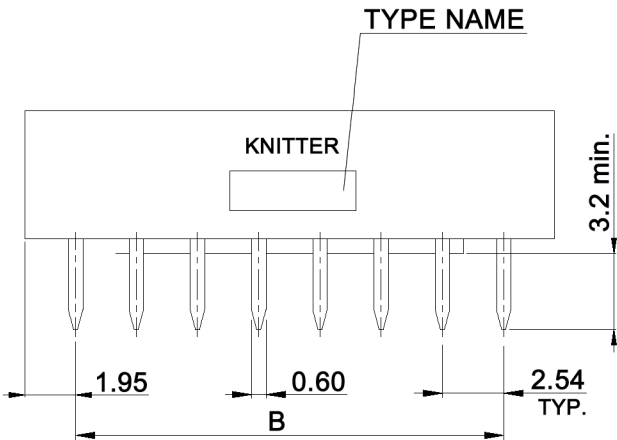

DATE CODE

First digit:
last digit of the year

Second digit:

- 1 January
- 2 February
- 3 March
- 4 April
- 5 May
- 6 June
- 7 July
- 8 August
- 9 September
- X October
- Y November
- Z December

SCHEMATIC




(2, 3, 4, 5, 6, 7, 8, 9, 10, 12, POS AVAIL)

Specifications:

- Contact rating: 100mA, 50V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles per switch
- Electrical life: 5 000 cycles per switch 25mA, 24V DC
- Operating force: 1 000gf max.
- Soldering conditions: wave-soldering: 260°C, max. 5sec.
- Stroke: 2.0mm
- Material: Contacts / terminals: phosphor bronze, 0.2µm gold plated over 1µm nickel
Case: PBT, UL94V-0, black
Top seal: polyester film
Potting material: epoxy

P.C.B. LAYOUT

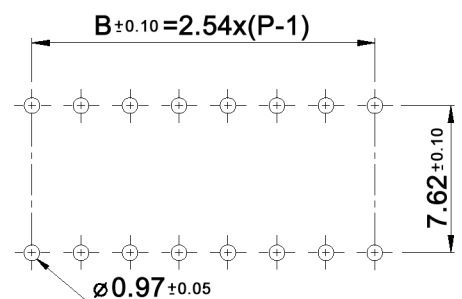

Tolerances: ±0.20mm		Date	Name
		04/09	dr
Operat. temperature	11/09	dr	
Mechan., elect. life	11/09	dr	
Print	08/09	dr	
Plating	05/09	dr	
Modifications	Date	Name	

DSS 400 N

30 17 76


Page

1/2



knitter-switch

Packaging:

DSS 401 N - DSS 403 N:

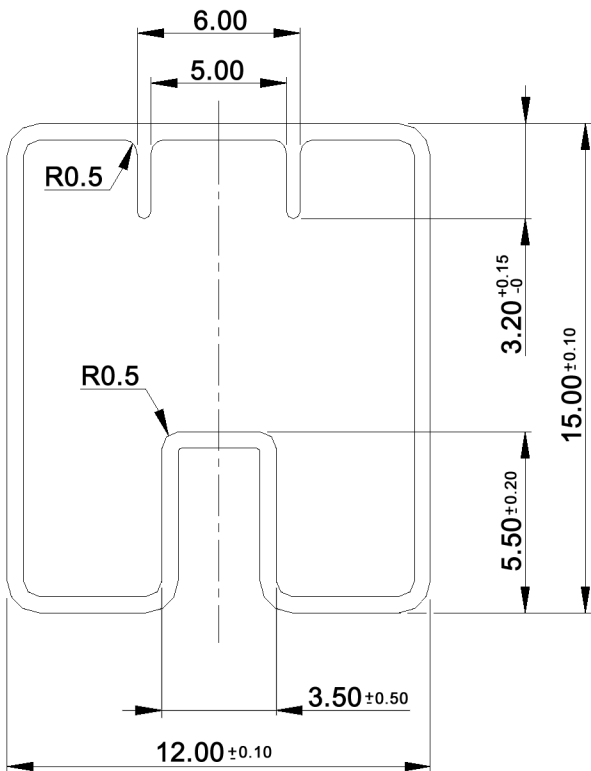

DSS 404 N - DSS 412 N:

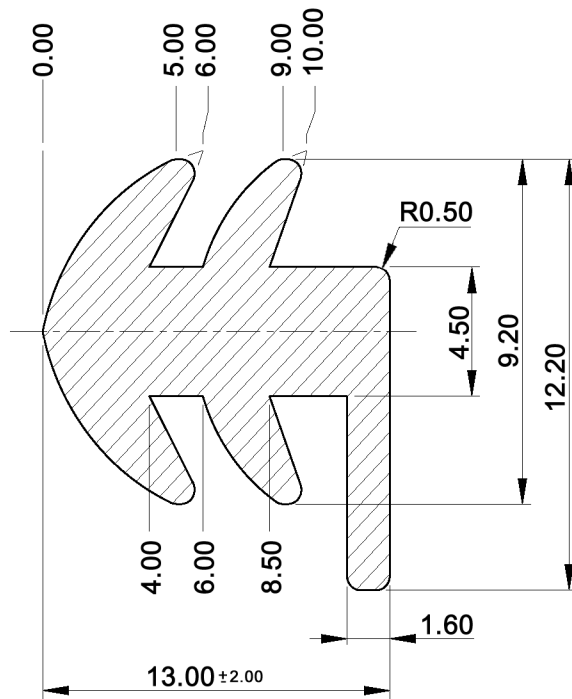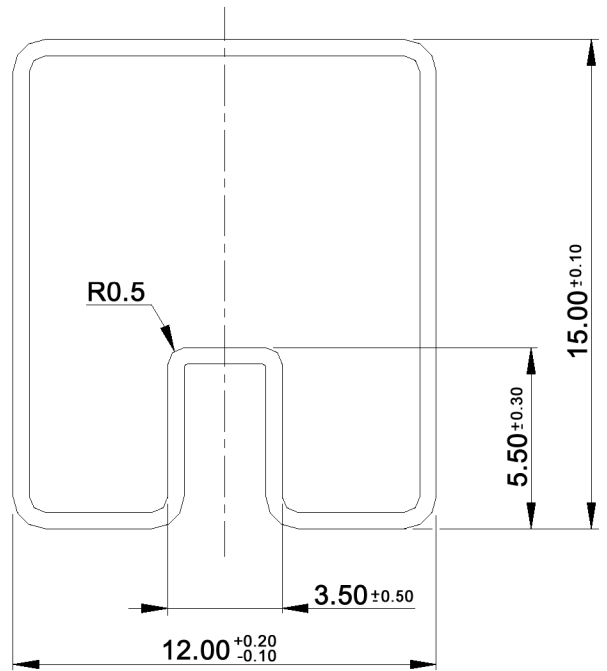

Pole	Quantity per tube
1	125
2	70
3	50
4	39
5	32
6	28
7	24
8	21
9	19
10	17
12	14



Tolerances: ±0.20mm			Date	Name
			04/09	dr
Modifications			Date	Name

DSS 400 N

knitter-switch

30 17 76

Page

2/2