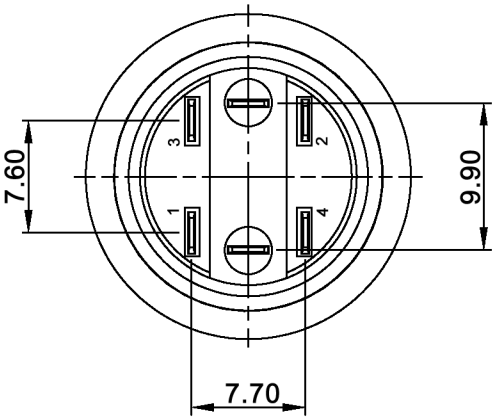

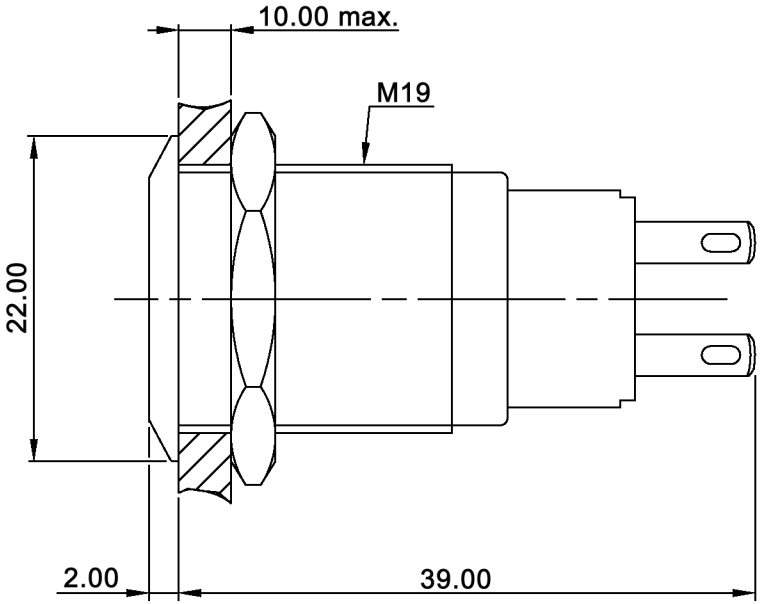

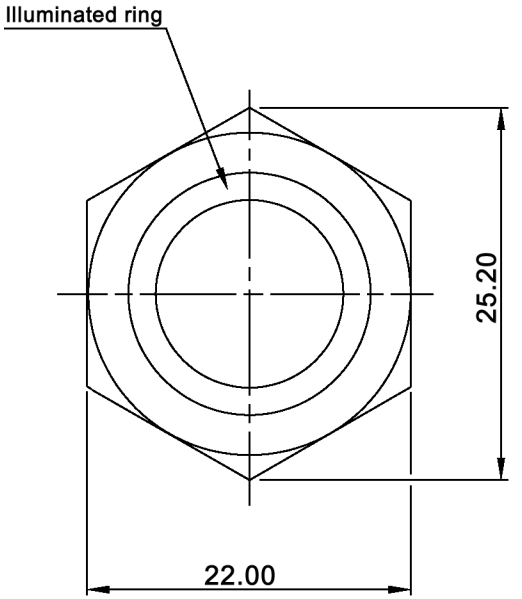

Specifications:

Contact rating:	5A, 250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	1 000MOhm min. at 500V DC
Dielectric strength:	2 000V RMS (50/60Hz)
Operating temperature:	-40°C to +85°C
Electrical life:	50 000 cycles
Operating force:	4N max.
Torque:	5-14Nm max. applied to nut
Switching function:	on - on (latching)
IP class:	IP65 protection
IK class:	09

Material:
Contact: silver alloy
Nut: nickel plated brass
Base: PBT
Bushing / button: stainless steel with varnished polished

CONTACT CONFIGURATION



x	LED color
R	red
G	green
Y	yellow
O	orange
B	blue
W	white

y	LED voltage (AC/DC)
6V	6V, 15mA
12V	12V, 15mA
24V	24V, 15mA
36V	36V, 15mA
110V	110V, 5mA
220V	220V, 5mA

Tolerances:0.00 to 30.00: ±0.20mm 30.01 to 80.00: ±0.25mm			Date 04/10	Name dr
Operating temperature	05/11	dr	knitter-switch	
IK class	06/10	dr		
Modifications	Date	Name		

MAV03LB22M3FRxy

30 20 68

Page 1/1