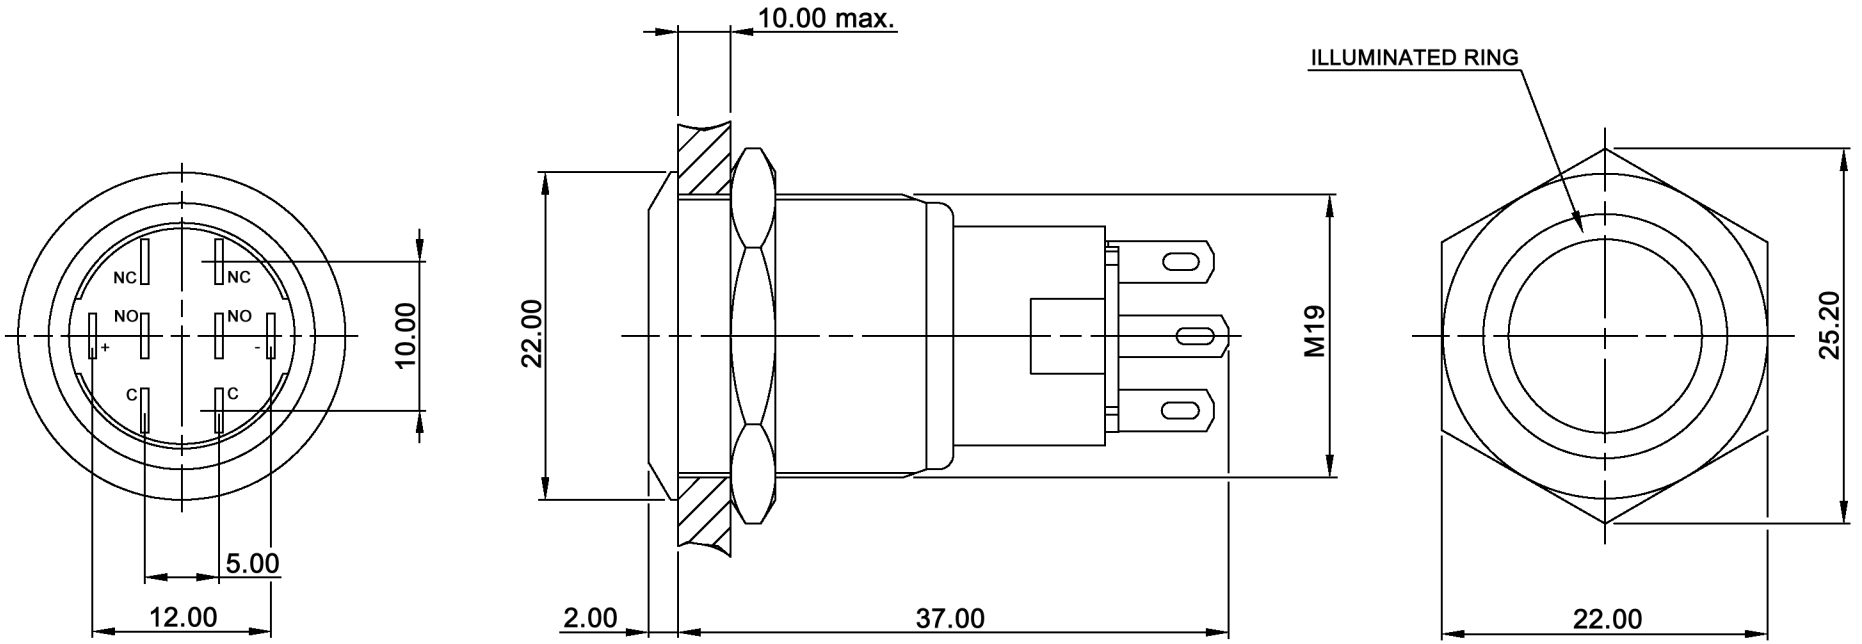

Specifications:

Contact rating:	5A, 250V AC
Contact resistance:	50mOhm max.
Insulation resistance:	1 000MOhm min. at 500V DC
Dielectric strength:	2 000V RMS (50/60Hz)
Operating temperature:	-40°C to +85°C
Electrical life:	50 000 cycles
Operating force:	4N max.
Switching function:	on - mom
IP class:	IP67 protection
IK class:	08
Torque:	5-14Nm max. applied to nut
Illumination:	by LED, integrated shunt, use 6V AC/DC operating voltage

Material:
Bushing / button: nickel plated brass with varnished polished
Contact: silver alloy
Nut: nickel plated brass
Base: PBT

CONTACT CONFIGURATION



x	LED colour
R	red
G	green
Y	yellow
O	orange
B	blue
W	white

Tolerances: 0.00 to 30.00: ±0.20mm 30.01 to 80.00: ±0.25mm			Date 06/09	Name dr
Operating temperature	05/11	dr		
IK class	06/10	dr		
Operating temperature	04/10	dr		
Modifications	Date	Name		

MAV22LB2M3FRxLO-6V

knitter-switch

30 18 41

Page 1/1