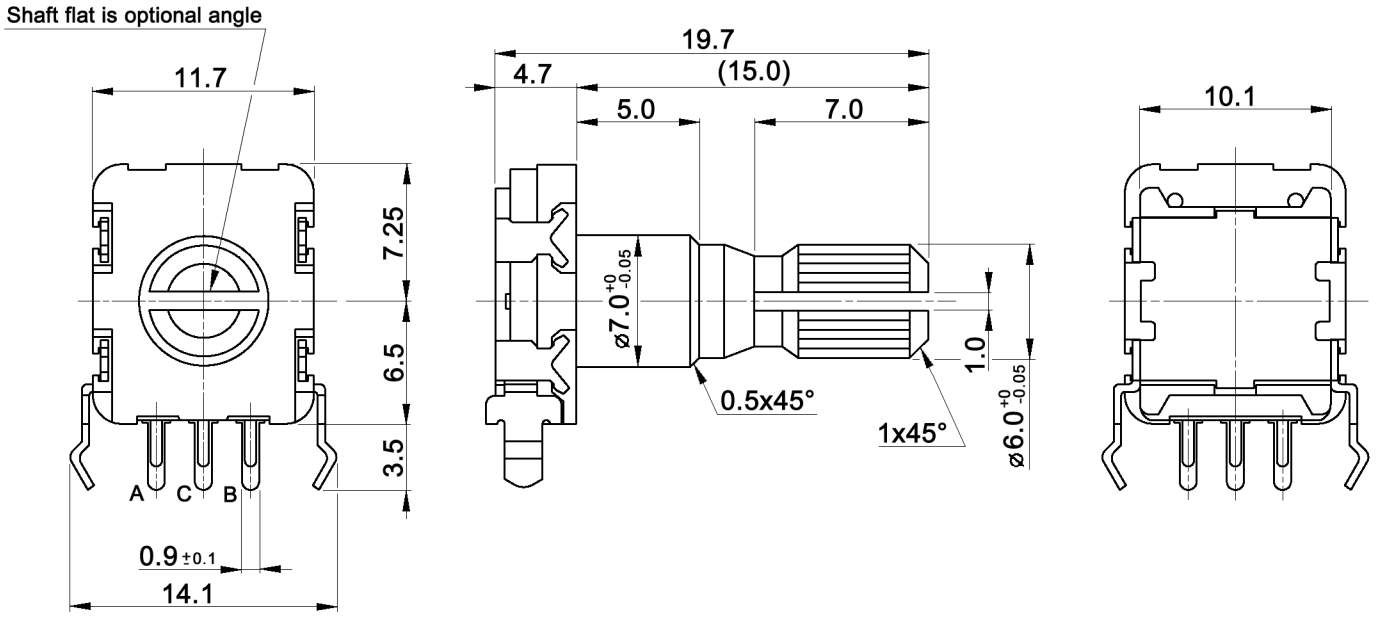

OUTPUT SIGNAL FORMAT

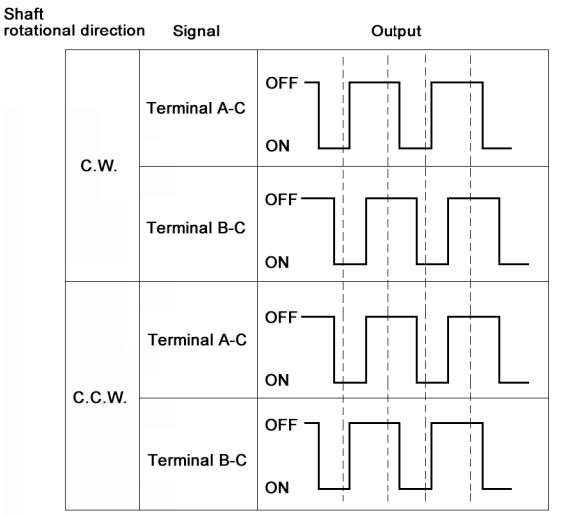

P.C.B. MOUNTING

t=1.6mm

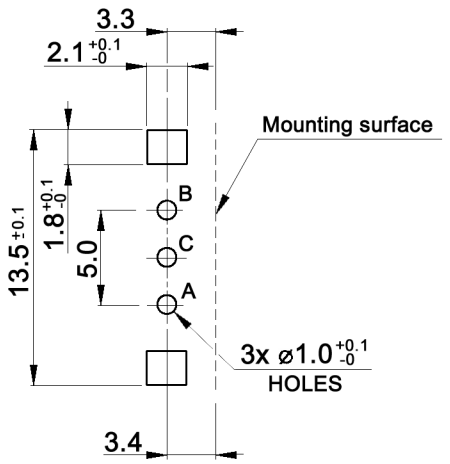

Specifications:

Contact rating:	10mA, 5V DC (1mA min.)
Insulation resistance:	100MOhm min. at 250V DC / 1mA
Dielectric strength:	300V AC for 1 minute
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Rotational life:	15 000 cycles
Detent torque:	11 +/-8mNm
Resolution:	15 pulses
No. of detents:	30 detents; step angle: 12° +/-3°
Soldering conditions:	260 +/-5°C, 5 +/-1.0sec.

RoHS-conform CE SGS 2002

Tolerances: ≤10: ±0.3mm 10-100: ±0.5mm			Date	Name	MER11-15215A-R
			04/08	dr	
			knitter-switch	30 14 56	Page 1/1
Temperatures	07/08	dr			
Modifications	Date	Name			