


CIRCUIT DIAGRAM




C: COMMON PIN
BOTTOM VIEW

Specifications:

- Contact rating: 0.1A, 12V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles
- Operating force: 200gf +/-100gf
- Material: Spring plate: PBS, washing
Contact clip: PBS, silver plated
Slider: PA46, black
Terminal: brass, silver plated
Base: phenolic resin, natural
Frame: SPCC, Sn

HOLE LAYOUT ± 0.05



Tolerances: up to 10: ± 0.2 mm above 10-50: ± 0.3 mm	Date	Name
	08/06	dr
Tolerances	05/10	dr
Modifications	Date	Name

MFP 113 D

30 09 57


Page

1/2

knitter-switch

Soldering conditions:

Temperature profile of reflow soldering

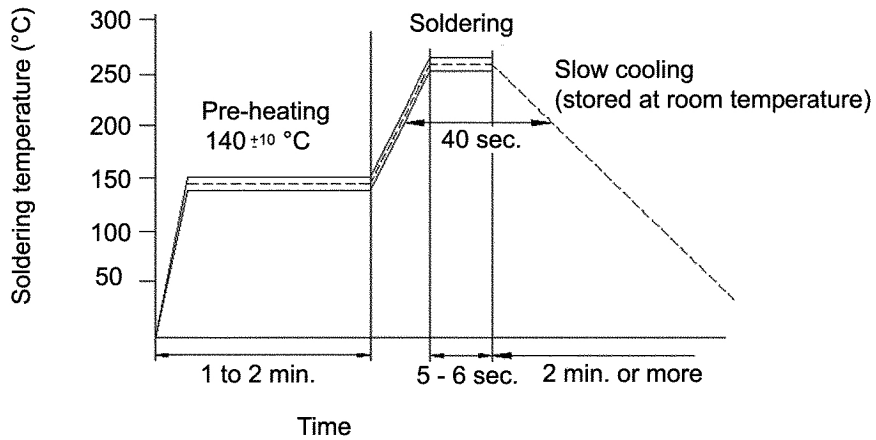

Peak: 260 +/-3°C; 5 - 6sec. / 220 +/-5°C; 40sec.



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	<h1>MFP 113 D</h1>
			08/06	dr	
			knitter-switch		<h2>30 09 57</h2>
Modifications	Date	Name			Page 2/2