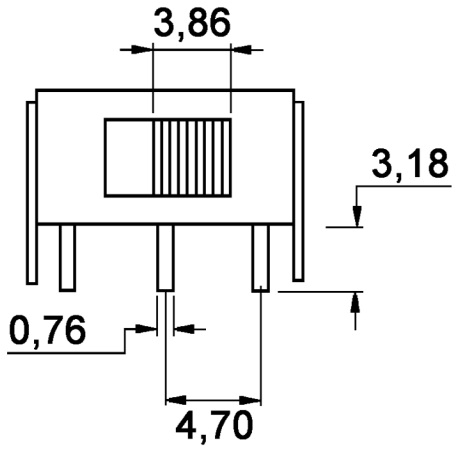

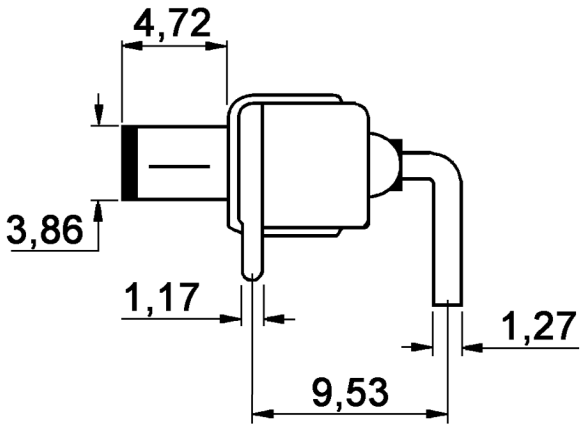

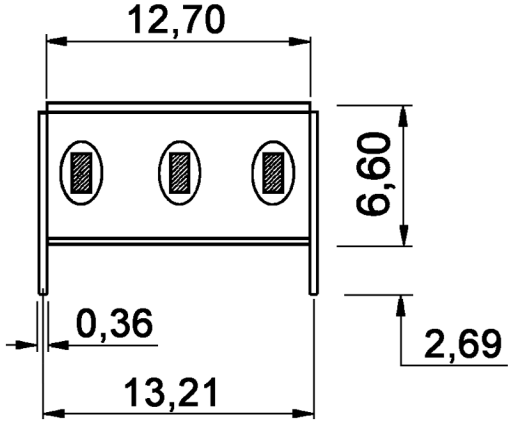

Specifications:

Contact rating:	5A with resistive load @ 120V AC or 28V DC 2A with resistive load @ 250V AC
Contact resistance:	10mOhm max.
Insulation resistance:	1 000MOhm min.
Dielectric strength:	1 000V RMS @ see level
Operating temperature:	-30°C to +85°C
Electrical life:	30 000 actuations at full load
Switching function:	on - on
Travel:	2,16mm
Material:	Case: diallyl phthalate (DAP) Housing: stainless steel Slide: nylon Terminals / contacts: copper alloy, silver plated

RoHS-conform 2002/95/EC

Tolerances:			Date	Name	MFP 116 D-RA	
			11/03	us		
RoHS compliant	07/10	dr	knitter-switch		30 03 97	Page 1/1
Modifications	Date	Name				