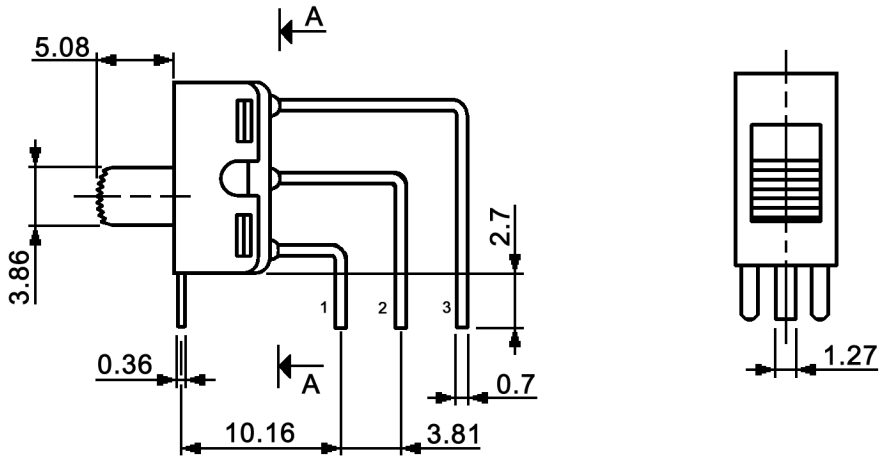

A-A

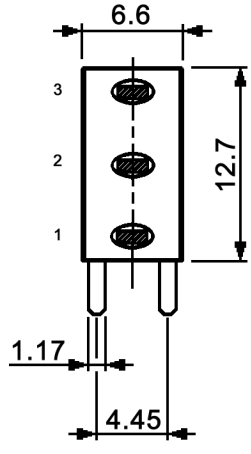

LAYOUT

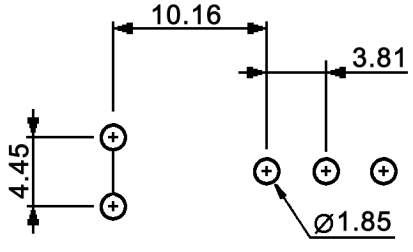

Specifications:

Contact rating:	20mA, 20V DC or 20mA, 20V AC; 0.4VA
Contact resistance:	10mOhm max.
Insulation resistance:	1 000MOhm min.
Dielectric strength:	1 000V RMS
Operating temperature:	-30°C to +85°C
Electrical life:	30 000 cycles at full load
Switching function:	on - on
Material:	Contacts / terminals: copper alloy with gold plated over nickel plated
	Case: diallyl phthalate (DAP) (UL94V-0)
	Actuator: nylon, black
	Housing: stainless steel

RoHS-conform 2002/95/EC

Tolerances:			Date	Name	MFP 116 DB-VM	
			12/04	dr		
RoHS compliant	05/10	dr	knitter-switch		30 05 34	Page 1/1
Modifications	Date	Name				