


Layout

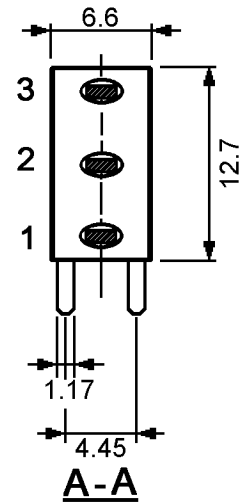

A-A

Specifications:

- Contact rating: 2A, 250V AC or 5A, 28V DC
- Contact resistance: 10mOhm max.
- Insulation resistance: 1 000MOhm min.
- Dielectric strength: 1 000V RMS @ see level
- Operating temperature: -30°C to +85°C
- Electrical life: 30 000 actuation at full load
- Switching function: on -off - on
- Material: Contacts / terminals: copper alloy, silver plated  
Case: diallyl phthalate (DAP) (UL94V-0)  
Actuator: nylon, black  
Housing: stainless steel



Tolerances:			Date	Name
			09/04	us
RoHS compliant	07/10	dr		
Modifications	Date	Name		

# MFP 116-9 E-VM

## 30 04 94