


Layout



Specifications:

- Contact rating: 0,4VA max., 20V max.
- Contact resistance: 10mOhm max.
- Insulation resistance: 1 000MOhm min.
- Dielectric strength: 1 000V RMS q see level
- Operating temperature: -30°C to +85°C
- Electrical life: 30 000 actuations at full load
- Switching function: on - off - on
- Material: Contacts / terminals: brass with gold plated over nickel plated  
Case: diallyl phthalate (DAP)  
Actuator: nylon  
Housing: stainless steel

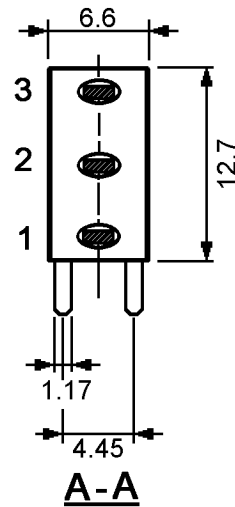

Tolerances:			Date	Name
			10/99	mm
RoHS compliant	07/10	dr	<b>knitter-switch</b>	
Modifications	Date	Name		

# MFP 116-9 EB-VM

## 30 01 50

Page

1/1