



CIRCUIT DIAGRAM



HOLE LAYOUT  $\phi 0.05$   
TOP VIEW

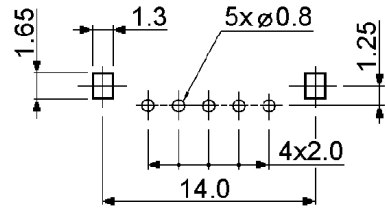

Specifications:

- Contact rating: 0.1A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles
- Operating force: a-b c-b: 220gf +/-100gf  
b-a b-c: 300gf +/-150gf
- Soldering heat resistance: 260 +/-5°C, 5 +/-1sec.
- Material: Contact clip: C5210, silver plated  
Frame: SPCC, nickel plated  
Slider: POM, black  
Terminal: brass strip, silver plated  
Base: phenolic resin, natural  
Spring plate: SUS, washing



|  |       |      |
|--|-------|------|
| Tolerances: ≤ 10mm: ±0.2mm<br>≥ 10mm: ±0.3mm | Date  | Name |
|  | 08/07 | dr   |

MFP 139-RA-6

|               |      |      |                       |          |      |
|---------------|------|------|-----------------------|----------|------|
|               |      |      | <b>knitter-switch</b> | 30 12 02 | Page |
|               |      |      |                       |          | 1/1  |
| Modifications | Date | Name |                       |          |      |