

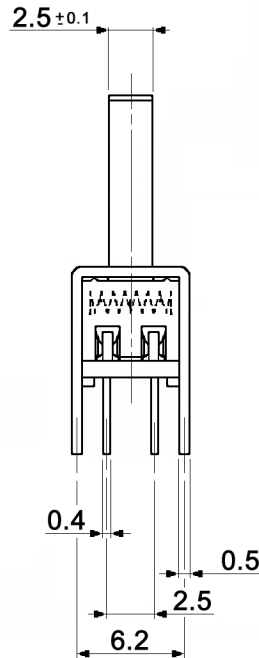
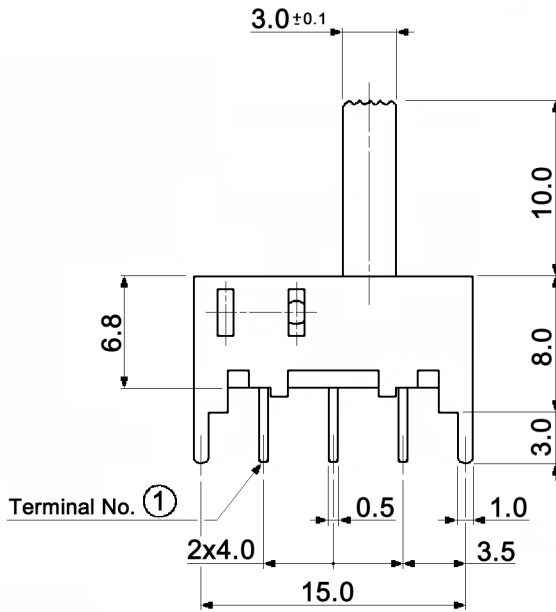


HOLE LAYOUT ± 0.05

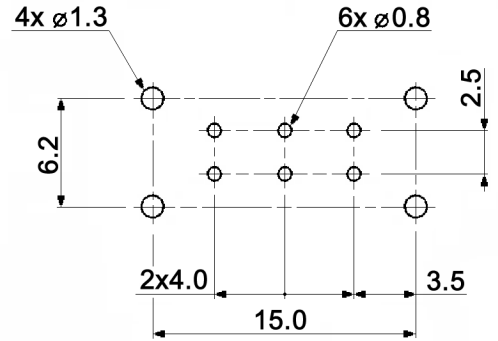

CIRCUIT DIAGRAM
C: COMMON PIN
BOTTOM VIEW



Specifications:

- Contact rating: 0.35A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC for 1 minute (50/60Hz, 2mA)
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles min.
- Operating force: 200gf +/-100gf
- Soldering heat resistance: bath method: 260 +/-5°C; 5 +/-1.0sec.
- Contact timing: non - shorting
- Switching function: on - on
- Material:
 - Slider: POM, black
 - Frame: SPCC, nickel plated
 - Steel ball: carbon steel, natural
 - Spring: SWC, temper
 - Contact clip: C5210R-EH, silver plated
 - Base: phenolic resin, natural
 - Terminal: brass strip, silver plated



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	06/08	dr

MFP 211 N-10

Modifications	Date	Name	knitter-switch	30 15 05	Page
					1/1