



HOLE LAYOUT $\oplus 0.05$

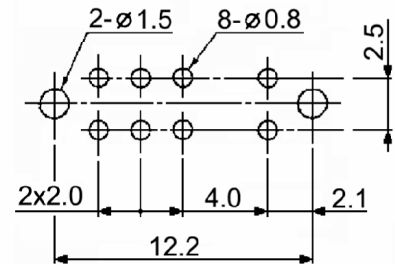

Specifications:

- Contact rating: 30V DC, 350mA
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V, 50Hz for the duration of 1 minute
- Mechanical life: min. 10 000 operations
- Contacts: copper alloy, silver plated over nickel barrier
- Contact timing: shorting
- Slide colour: black, further colours on request
- Soldering conditions: auto-soldering-max.: 3sec., 260°C +/-5°C
- Switching function: on - on
- RoHS compliant
- Material: Contact clip: C5210, Ag
Slider: POM, black
Spring plate: C5210, washing
Terminal: brass strip, Ag
Base: phenolic resin, natural
Frame: SPCC, Sn

CIRCUIT DIAGRAM



C: COMMON PIN
BOTTOM VIEW

Maßstab		Datum		Name	
Oberfläche		01/06		dr	
Zust	Änderung	Datum	Name	<div style="font-size: 2em; font-weight: bold; margin-bottom: 10px;">MFP 212 P</div> <div style="font-size: 1.5em; font-weight: bold; margin-bottom: 10px;">30 09 09</div> <div style="display: flex; justify-content: space-between;"> Blatt 1/1 </div>	

knitter-switch