


P.C. MOUNTING

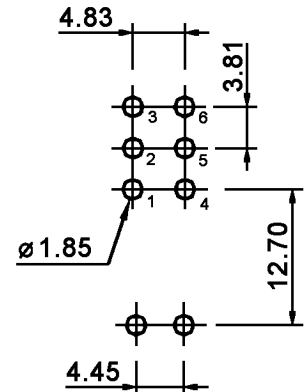

Specifications:

- Contact rating: 2A, 250V AC or 5A, 28V DC
- Contact resistance: 10mOhm max.
- Insulation resistance: 1 000MOhm min.
- Dielectric strength: 1 000V RMS
- Operating temperature: -30°C to +85°C
- Electrical life: 30 000 make-and-break cycles at full load
- Materials: Case: diallyl phthalate (DAP) (UL94V-0)
Housing: stainless steel
Actuator: nylon, black
Contact: copper alloy, silver plated
Terminal seal: epoxy
- Switching function: ON-ON

Maßstab		Datum	Name	MFP 216-9 N-VM
Oberfläche		09/04	dr	
		knitter-switch		30 04 93
Zust	Änderung	Datum	Name	Blatt