


P.C. MOUNTING

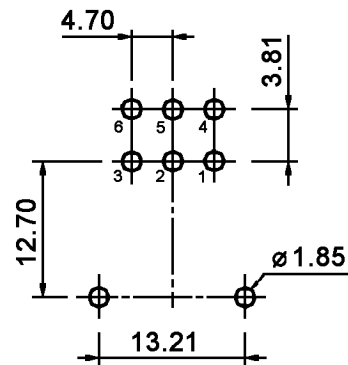

Specifications:

- Contact rating: 0.4VA max.; 20V AC or DC max.
- Contact resistance: 10mOhm max.
- Insulation resistance: 1 000MOhm min. at 500V DC
- Dielectric strength: 1000V, 50Hz for 1 minute
- Operating temperature: -30°C to +85°C
- Electrical life: 30 000 operations
- Materials: Case: diallyl phthalate (DAP) (UL94V-0)  
Housing: stainless steel  
Actuator: nylon, black  
Contact: copper alloy, gold over nickel  
Terminal seal: epoxy
- Switching function: on - on

Maßstab		Datum	Name	<b>MFP 226-9 NB-RA</b>
Oberfläche		08/05	dr	
			<b>knitter-switch</b>	<b>30 06 83</b>
Zust	Änderung	Datum	Name	Blatt 1/1