



HOLE LAYOUT ± 0.05

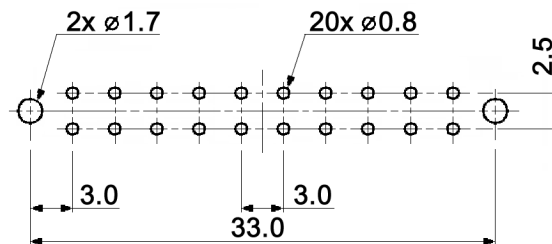

Specifications:

- Cotact rating: 0.1A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 10 000 cycles
- Soldering conditions: auto-soldering: 260 +/-5°C, 5 +/-1sec.
- Operating force: a-b c-b: 180 +/-80gf
b-a b-c: 230 +/-100gf
- Switch timing: non-shorting
- Material: Terminal: brass strip, silver plated
Base: phenolic resin, natural
Spring plate: stainless steel, washing
Contact clip: C5210R-EH, silver plated
Frame: stainless steel, tin plated
Slider: POM, black

CIRCUIT DIAGRAM
C: COMMON PIN
BOTTOM VIEW

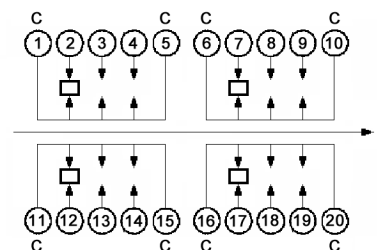

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	12/08	dr
Modifications	Date	Name

MFP 431 R

30 16 74

knitter-switch