



SWITCH POSITION



P.C. LAYOUT

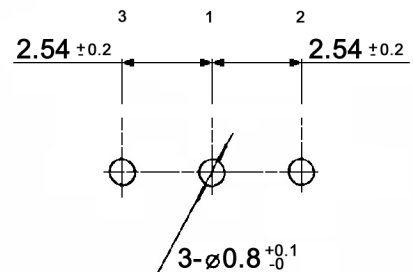

Specifications:

- Contact rating: 0.5A, 12V AC or DC; 0.3A, 24V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 500MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute
- Operating force: 800gf max.
- Soldering conditions: 270°C, 5sec.max.
- Mechanical life: 10 000 cycles
- RoHS compliant
- Material: Case: fiberglass reinforced polyamide
Terminal: brass, gold plated

Maßstab		Datum	Name	MMP 1010 D-RA-1
Oberfläche		03/07	dr	
		knitter-switch		30 10 80
Mechanical life	07/07	dr		Blatt
Zust	Änderung	Datum	Name	1/1