



P.C.B. LAYOUT

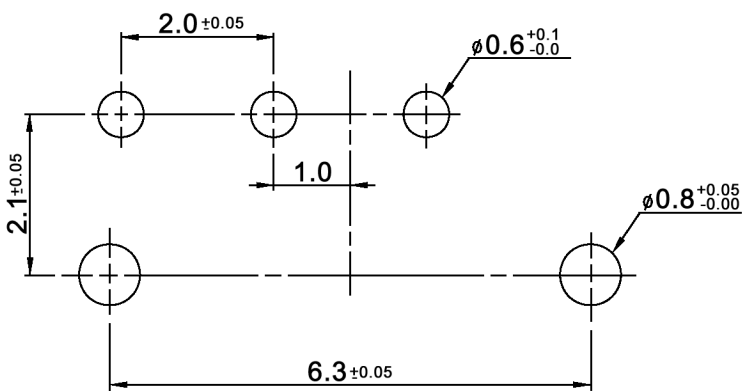

CIRCUIT DIAGRAM



Tolerances: ±0.20mm max.	Date	Name
	06/11	dr

MMP 1263 NLRP

knitter-switch

30 23 81

Page

1/2

Modifications	Date	Name
---------------	------	------

Specifications:

Contact rating: non-switching: 100mA, 50V DC
 switching: 25mA, 24V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 500V DC for 1 minute +/-5sec.
 Dielectric strength: 500V AC (50/60Hz) for 1 minute
 Operating temperature: -20°C to +70°C
 Storage temperature: -40°C to +85°C
 Electrical life: 10 000 cycles
 Operating force: min.: 100gf; max.: 350gf
 Soldering conditions: 260 +/-5°C, 3 +/-1sec.
 Material: Cover: stainless steel
 Stem / base: high-temp. thermoplastic LCP, molded black
 Contact: copper, gold plated
 Spring: piano wire
 Terminal: brass, gold plated



Tolerances: ±0.20mm max.			Date	Name	<h1>MMP 1263 NLRP</h1>
			06/11	dr	
			knitter-switch		<h2>30 23 81</h2>
					Page
					2/2
Modifications	Date	Name			