


**Specifications:**

Contact rating: 6V-, 200mA  
 Contact resistance: < 50mOhm  
 Insulation resistance: > 100 MOhm  
 Mechanical life: 5000 cycles min.  
 Contacts: phosphor bronze, gold plated  
 Terminals: brass, gold plated  
 Contact timing: non shorting  
 Slide color: blue  
 soldering conditions: auto soldering, 230°C, 3 sec

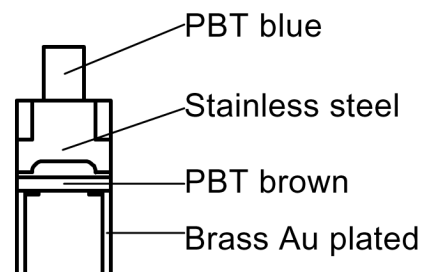

Maßstab		Datum	Name	<b>MMP 221 B S</b>	
Oberfläche		Bearb.			
		Gepr.			
		Norm			
<b>knitter-switch</b>				211314	Blatt
Zust.	Änderung	Datum	Name		Bl.