



CIRCUIT DIAGRAM  
C: COMMON PIN



Specifications:

- Contact rating: 0.3A, 6V DC
- Contact resistance: 70mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Mechanical life: 5 000 cycles
- Operating force: 250 +/-150gf
- Material: Terminal: brass, 0.25u gold plated  
Cover: SUS, washing  
Slider / case: LCP, natural  
Contact plate: phosphor bronze, 0.25u gold plated

HOLE LAYOUT  $\pm 0.05$



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	11/07	dr
Specifications	10/08	dr
Modifications	Date	Name

**MMP 221 B2F**


**30 12 73**

Page

1/2

**knitter-switch**

Soldering conditions:

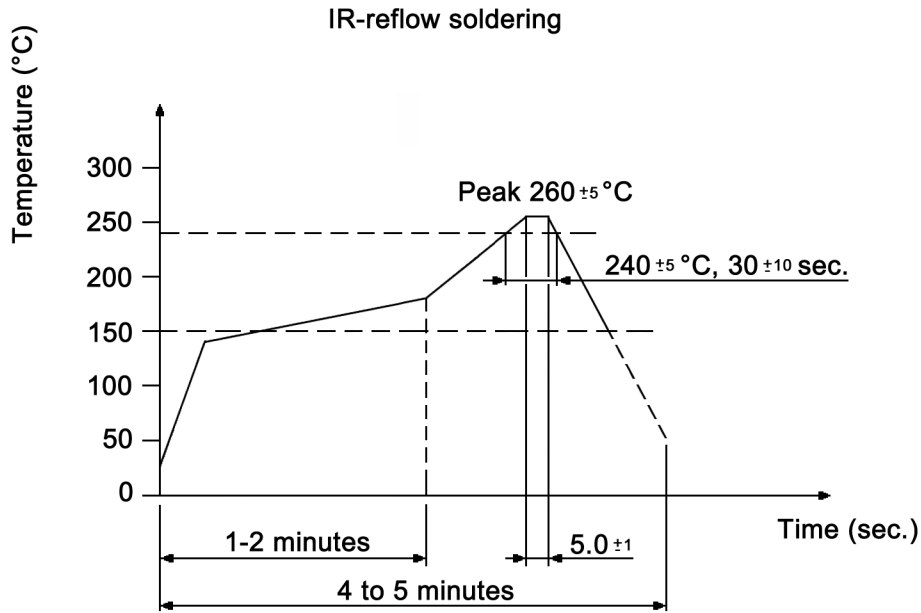

auto-soldering: 260 +/-5°C, 5 +/-1sec.



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	11/07	dr

**MMP 221 B2F**

**knitter-switch**

**30 12 73**

Page

2/2

Modifications      Date      Name