


Specifications:

- Contact rating: 6V-, 200mA
- Contact resistance: <50mOhm
- Insulation resistance: >100MOhm
- Mechanical life: 1000 cycles min.
- Contacts: phosphor bronze, gold plated
- Terminals: brass, gold plated
- Contact timing: non shorting
- Slide color: natural
- Soldering conditions: auto soldering, 260°C, 5sec. max.
- RoHS compliant

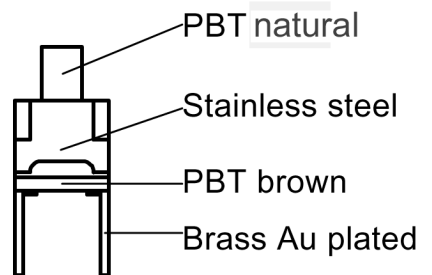

Maßstab				Datum	Name
Oberfläche		Bearb.			
slide color	28.01.05	us	Gep.		
soldering	03/06	dr	Norm		
knitter-switch					
Zust.	Änderung	Datum	Name		

MMP 221 BF
without grease

211314

Blatt

Bl.