




P.C.B. LAYOUT

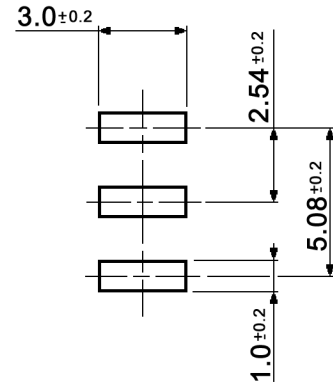

CIRCUIT DIAGRAM




SWITCH POSITION



Specifications:

- Contact rating: 0.2A, 24V; 0.5A, 12V
- Contact resistance: 50mOhm max.
- Insulation resistance: 10 000MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute (2mA)
- Operating temperature: -25°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 5 000 cycles
- Operating force: 800gf max.
- Packing: 54 pcs. / tube
- Soldering conditions: 260 +/-3°C, 5sec. max.

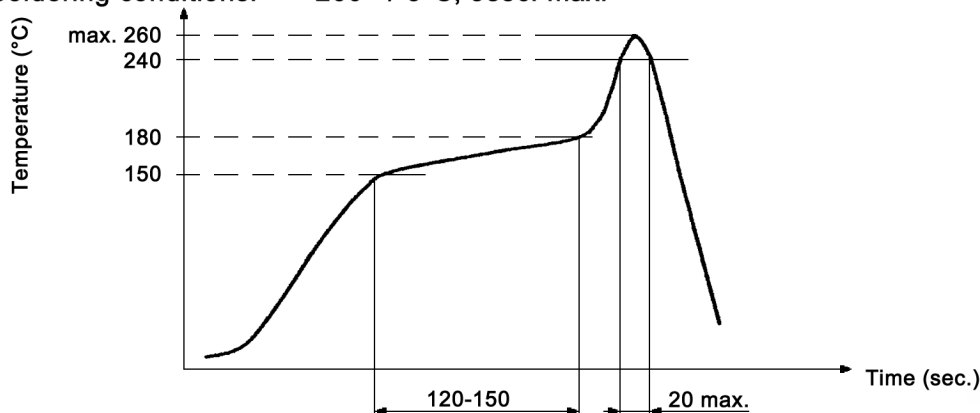

Tolerances: 0 - 1: ±0.1mm 1 - 4: ±0.3mm 4 - 16: ±0.5mm	Date	Name
	01/03	us

# MMS 1010 D-R

Revised	02/12	dr
Modifications	Date	Name

**knitter-switch**

**30 03 42**

Page

1/2

