

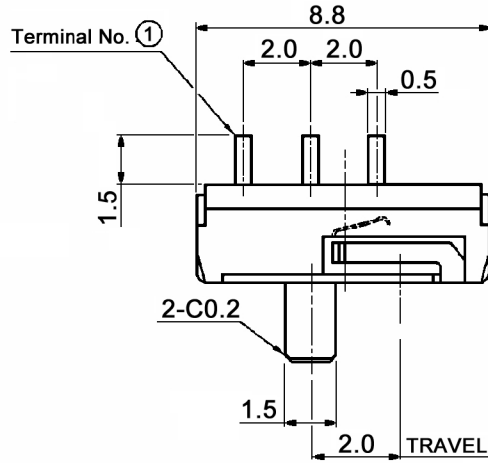


P.C.B. LAYOUT  $\oplus 0.05$

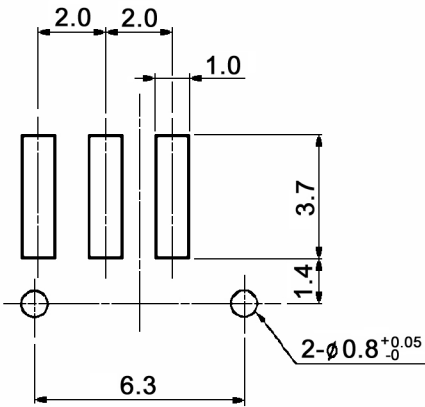

CIRCUIT DIAGRAM  
C: COMMON PIN  
BOTTOM VIEW



Specifications:

- Contact rating: 0.5A, 4V DC; 0.3A, 6V DC; 0.2A, 12V DC
- Contact resistance: 70mOhm max.
- Insulation resistance: 100MOhm min. at 100V DC for 1 minute
- Dielectric strength: 100V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles
- Operating force: 130gf +/-50gf
- Material:
  - Cover: SUS, washing
  - Slider: PA66, cream
  - Case: PA46, black
  - Contact plate: C1720, silver plated
  - Terminal: brass strip, silver plated



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	08/06	dr
Rating	09/10	dr
Operating temperature	08/09	dr
Soldering conditions	08/06	dr
Modifications	Date	Name

MMS 124 T

**knitter-switch**


**30 09 52**

Page

1/2

Soldering conditions:

Temperature profile of reflow soldering

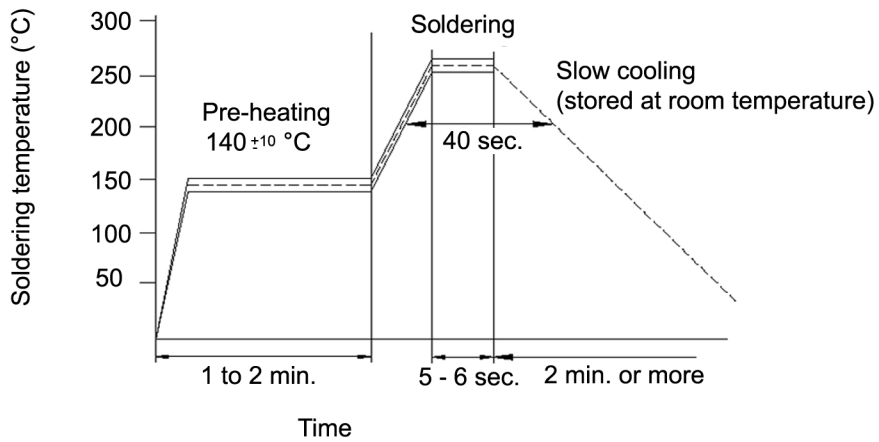

Peak: 260 +/-3°C; 5 - 6sec. / 220 +/-5°C; 40sec.



Tolerances:			Date	Name	<b>MMS 124 T</b>	
			08/06	dr		
			<b>knitter-switch</b>		<b>30 09 52</b>	Page
						2/2
Modifications	Date	Name				