


Specifications:

Contact rating:	non-switching: 100mA, 50V DC switching: 25mA, 24V DC
Contact resistance:	10mOhm max.
Insulation resistance:	100MOhm min.
Dielectric strength:	500V AC (50Hz or 60Hz) for 1 minute
Operating temperature:	-20°C to +70°C
Storage temperature:	-40°C to +85°C
Operation force:	350gf max.
Soldering heat resistance:	260°C +/-5°C, 3 +/-1sec.
Mechanical life:	10 000 cycles
General tolerances:	max. +/-0.20mm
Material:	Cover: stainless steel Stem: high-temp. thermoplastic LCP, molded black Contact: copper, gold plated Spring: piano wire Base: high-temp. thermoplastic LCP, molded black Terminal: brass, gold plated

Soldering profile:

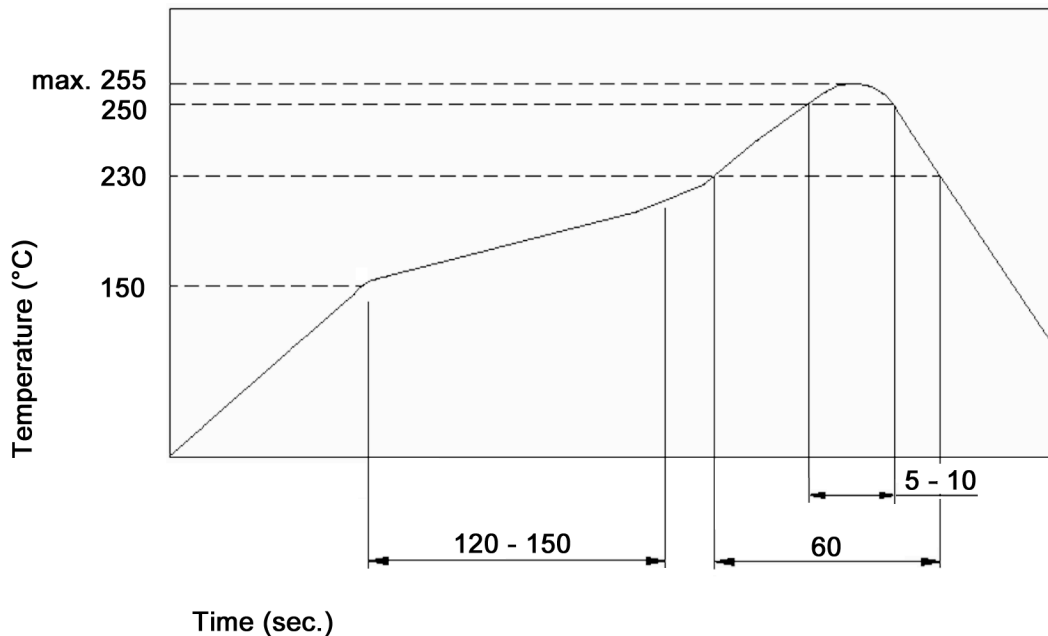

Maßstab		Datum	Name	MMS 136-R
Oberfläche		10/05	dr	
				30 07 01
			knitter-switch	
Zust	Änderung	Datum	Name	Blatt 2/2