



P.C.B. LAND DIMENSION
(Viewed from the switch mounting face)

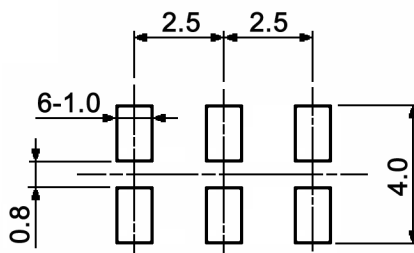

CIRCUIT DIAGRAM



C: COMMON PIN
BOTTOM VIEW

Specifications:

Contact rating: 0.3A, 6V DC
 Contact resistance: 70mOhm max.
 Insulation resistance: 100MOhm min. at 500V DC for 1 minute
 Dielectric strength: 500V AC for 1 minute (50/60Hz, 2mA)
 Operating temperature: -40°C to +105°C
 Soldering heat resistance: 260 +/-5°C, 5 +/-1sec.
 Mechanical life: 5 000 cycles
 Operating force: 200gf +/-100gf
 Material: Terminal: brass, gold plated 0.25µm
 Cover: SUS, washing
 Slider: PA46, blue, UL94HB
 Contact plate: C5210, gold plated 0.25µm
 Case: PA46, black, UL94V0



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	03/02	us
Operating temperature	01/10	dr
Material	04/08	dr
Specifications	10/06	dr
General tolerances	10/06	dr
Modifications	Date	Name

MMS 221 B

knitter-switch

30 03 03

Page

1/1