



# SPECIFICATIONS FOR TAPE AND REEL PACKAGING

## 1. STRUCTURE AND MATERIALS

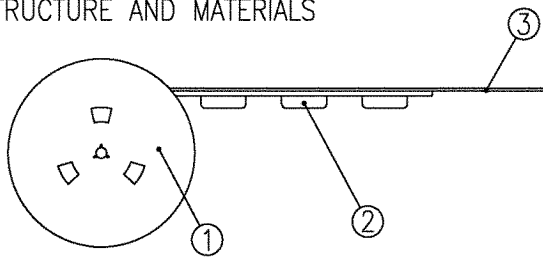

③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE
NO.	PARTS NAME	MATERIALS

2. PACKAGING QUANTITY : 1,400 PCS/REEL
3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 70 gf AND STRIPPING ANGLE SHOULD BE WITHIN 165° ~ 180°.
6. THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
7. DIMENSIONS :

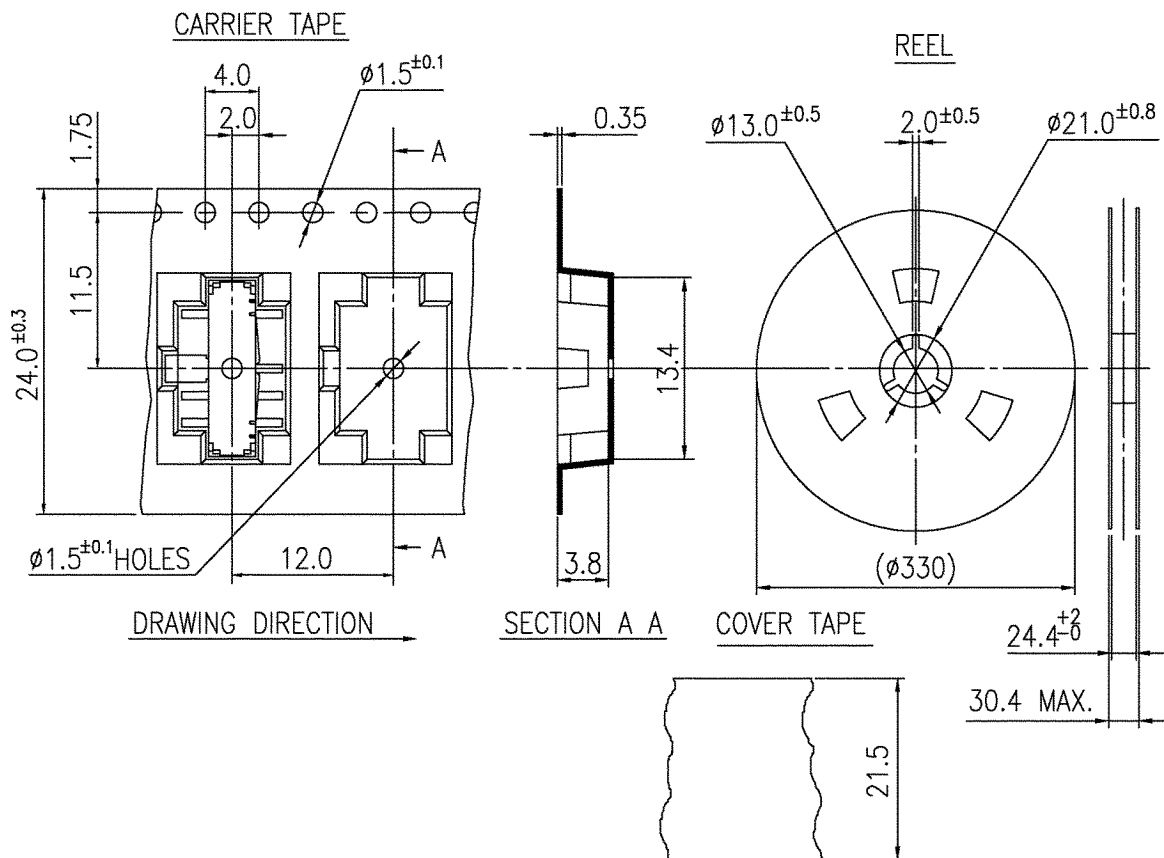

Maßstab		Datum	Name	<h1 style="margin: 0;">MMS 237-R</h1> <h2 style="margin: 0;">Taping</h2> <h3 style="margin: 0;">30 05 84</h3>
Oberfläche		03/05	dr	
<b>knitter-switch</b>				Blatt
Zust	Änderung	Datum	Name	1/1