


PANEL MOUNTING

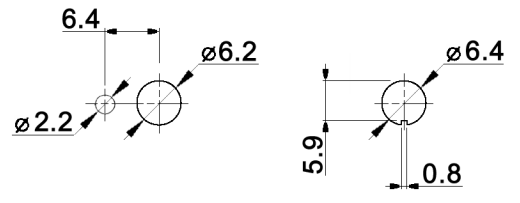

CONTACT ARRANGEMENT

code for x	function	actuator position/connected terminals	
N	On-On (alternating)	Pos.1: 1-2, 4-5	Pos. 2: 2-3, 5-6
R	Mom-On	Rest position: 1-2, 4-5	Pressed down: 2-3, 5-6

Specifications:

- Contact rating: 3A, 250V AC / 6A, 125V AC
4A, 30V DC / 5A, 12V DC
6A, 6V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 1 000MOhm min. at 500V DC
- Dielectric strength: 1 500V, 50Hz for the duration of 1 minute
- Operating temperature: -45°C to +140°C
- Mechanical life: 30 000 cycles
- Soldering conditions: hand-soldering: max.: 420°C, 3sec., 60W
auto-soldering: max.: 270°C, 5sec.
- Mounting instruction: max. torque: 49Ncm
- Material: Terminal: brass, C1020 silver plated
Case: DAP
Housing: stainless steel, CNS9265
Bushing: copper alloy, C3604BD nickel plated
Actuator: copper alloy, C3604BD chrome plated
- Included accessories: 2 pcs. nut M6x0.75, nickel plated, 9mm wrench size
1 pc. tooth washer
1 pc. locking washer



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm	Date	Name
	06/09	dr
Dimension	01/11	dr
Panel mounting	05/10	dr
Modifications	Date	Name

MPA 206 x

30 18 30

knitter-switch