


SWITCH FUNCTION

Model No.	POS. 1	POS. 2
MPME 2 N	ON	MOM
Term. Comm.	1-3, 4-6	1-2, 4-5

P.C. MOUNTING

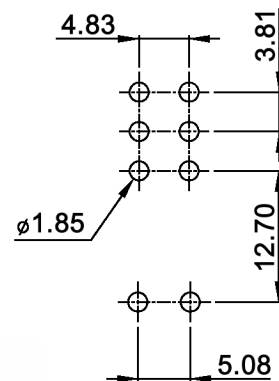

Specifications:

Contact rating: 1A, 250V AC; 3A, 120V AC or 28V DC
Contact resistance: 20mOhm max. at 2-4V DC
Insulation resistance: 1 000MOhm min.
Dielectric strength: 1 500V RMS
Operating temperature: -30°C to +85°C
Mechanical life: 50 000 make-and-break cycles
Cap installation force: 45N max.
Material: Case / bushing: glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0)
 Plunger: glass filled nylon (UL94V-0)
 Switch support: brass, tin plated
 Switch support retainer: stainless steel
 N.O. / N.C. contacts: brass, silver plated over nickel plated
 Common contacts / all terminals: copper alloy, silver plated over nickel plated



Tolerances:	Date	Name	<h1>MPME 2 R-VM</h1>
	05/07	dr	
			<h2>30 11 20</h2>
			Page 1/1
Modifications	Date	Name	