

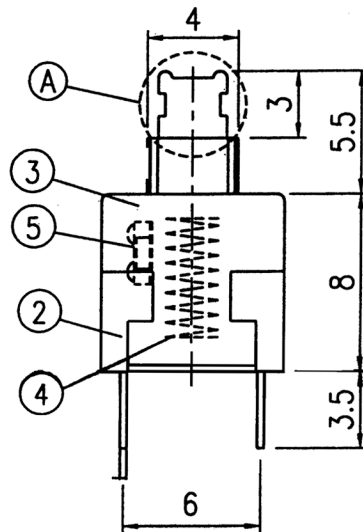
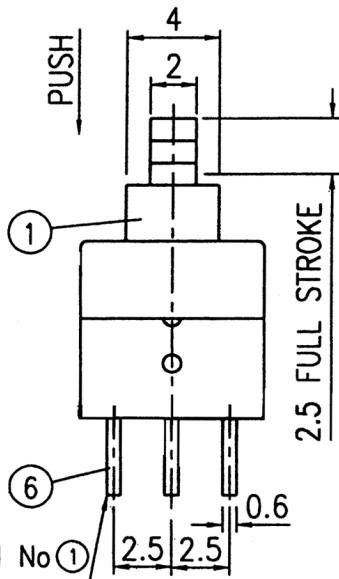


DETAIL A



Terminal No ①

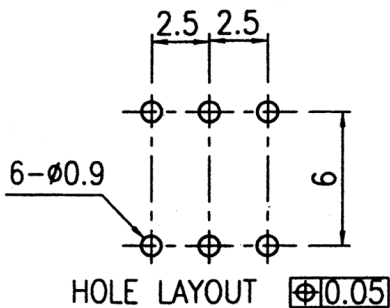

CIRCUIT DIAGRAM  
C:COMMON PIN  
BOTTOM VIEW

3	1	ON	OFF
4	6		
3	2	OFF	ON
4	5		

0.8 1.2 2.5

TIME LAG DIAGRAM

Specification:

- Contact rating: 30V DC, 0,1A
- Contact resistance: <70mOhm
- Insulation resistance: >50MOhm at 500V DC
- Operating temperature: -10°C to +60°C
- Mechanical life: more than 10000 cycles

Operating force: 380gf ± 100gf

Maßstab		Datum	Name	MPSA 22E-08-0-380
Oberfläche	Bearb.	07/02	us	
	Gepr.			
	Norm			
			<b>knitter-switch</b>	30 03 18
Zust.	Änderung	Datum	Name	Blatt 1/1
				Bl.