



HOLE LAYOUT



CIRCUIT DIAGRAM  
C: COMMON PIN  
BUTTON VIEW

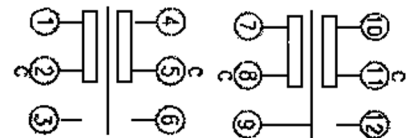

Specifications:

- Contact rating: 0.1A, 30V DC
- Contact resistance: 30mOhm
- Insulation resistance: 100MOhm
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -10°C to +60°C
- Operating force: 350 +/-100gf
- Material: Push / housing: POM  
Case: PBT  
Spring: SWC  
Contact clip: C5210R-EH  
Terminal: brass  
Spring wire: SUS 304H



Tolerances:			Date	Name
			08/02	us
Revised	12/09	dr		
Modifications	Date	Name		

**MPSA-42E06-L-0**

**knitter-switch**

**30 03 22**

Page

1/1