


PANEL MOUNTING

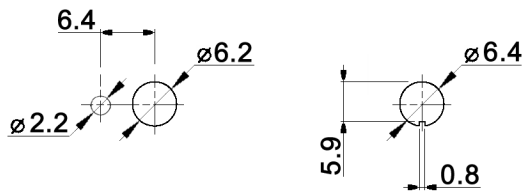

SWITCH FUNCTION

	POS. 1	POS. 2	POS. 3
x			
D	ON	-	ON
E	ON	OFF	ON
F	MOM	-	ON
G	MOM	OFF	MOM
H	MOM	OFF	ON

Specifications:

- Contact rating:** 3A, 250V AC / 6A, 125V AC
4A, 30V DC / 5A, 12V DC
6A, 6V DC
- Contact resistance:** 10mOhm max.
- Insulation resistance:** 1 000MOhm min. at 500V DC
- Dielectric strength:** 1 500V, 50Hz for the duration of 1 minute
- Operating temperature:** -45°C to +140°C
- Mechanical life:** min. 200 000 cycles
- Soldering conditions:** hand-soldering: max.: 420°C, 3sec., 60W
auto-soldering: max.: 270°C, 5sec.
- Mounting instruction:** max. torque: 49Ncm
- Material:** Terminal: brass, gold plated over silver
Case: DAP
Housing: stainless steel, CNS9265
Bushing: copper alloy, C3604BD nickel plated
Actuator: copper alloy, C3604BD chrome plated
- Included accessories:** 2 pcs. nut M6x0.75, nickel plated, 9mm wrench size
1 pc. tooth washer
1 pc. locking washer



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm		Date	Name	<h1>MTA 106 xG</h1>
		02/09	dr	
Dimension	01/11	dr	<h2>30 17 13</h2>	Page
Panel mounting	05/10	dr		1/1
Modifications	Date	Name		