


PANEL MOUNTING




Without locking ring

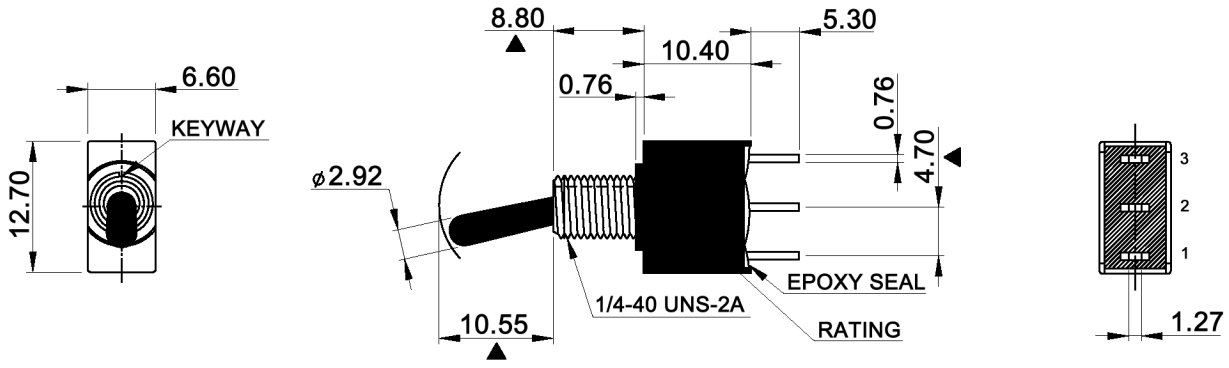


With standard locking ring

P.C. MOUNTING




HARDWARE













0.46 THK

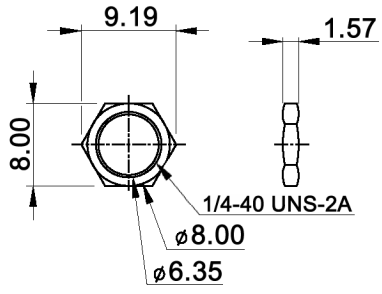SWITCH FUNCTION

| Model No. | POS. 1 | POS. 2 | POS. 3 |
|---|---|---|---|
| | | | |
| MZME 1 DB | ON | NONE | ON |
| Term. Conn. | 2-3 | OPEN | 2-1 |

Specifications:

| | |
|---|---|
| Contact rating: | 0.4VA max.; 20V max. (AC or DC) |
| Contact resistance: | 10mOhm max. at 2-4V DC |
| Insulation resistance: | 1 000MOhm min. |
| Dielectric strength: | 1 000V RMS |
| Operating temperature: | -30°C to +85°C |
| Mechanical life: | 30 000 make-and-break cycles |
| ESD resistance: | 10kV between actuator and terminals |
| UL certified | |
| Material: | Case / bushing: glass filled nylon 66, flame retardant, heat stabilized (UL94V-0) |
| | Actuator: glass filled nylon 6/6 |
| | Contact / terminal: copper alloy, gold plated |

RoHS-conform 2002/95/EC

| | | | | | |
|---|---|---|---|---|---|
| Tolerances: 0.00: ±0.25mm<br>0.0: ±0.40mm | | | Date | Name | MZME 1 DB-PC-ESD |
| | | | 03/08 | dr | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | knitter-switch | 30 14 14 | Page 1/1 |
| Panel mounting | 07/08 | dr | | | |
| Modifications | Date | Name | | | |