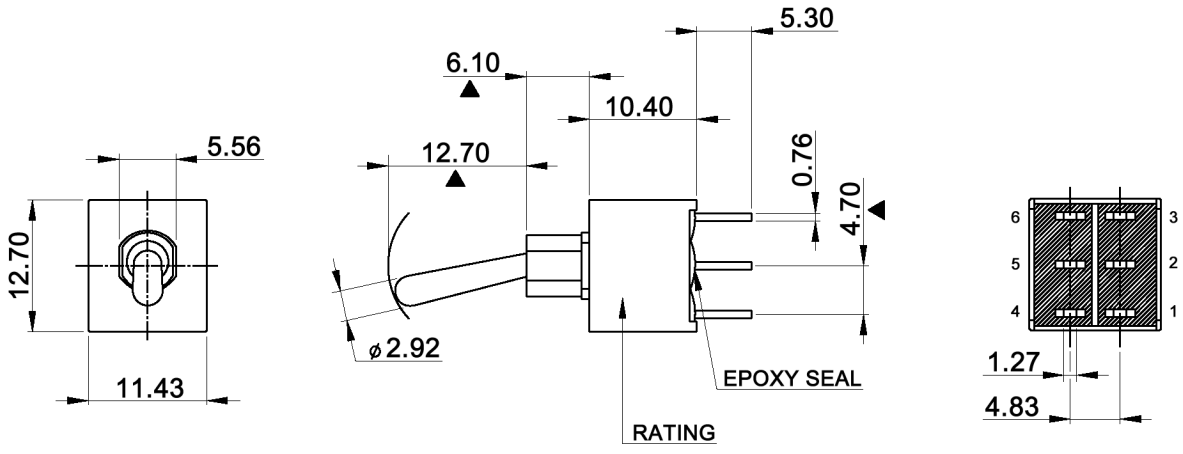

SWITCH FUNCTION

Model No.	POS. 1	POS. 2	POS. 3
MZME 2 NG	ON	NONE	ON
Term. Conn.	2-3, 5-6	OPEN	2-1, 5-4

P.C. MOUNTING



Specifications:

Contact rating:	2A, 250V AC; 5A, 120V AC or 28V DC
Contact resistance:	10mOhm max. at 2-4V DC
Insulation resistance:	1 000MOhm min.
Dielectric strength:	1 000V RMS
Operating temperature:	-30°C to +85°C
Mechanical life:	30 000 make-and-break
Material:	Case / bushing: glass filled nylon 66, flame retardant, heat stabilized (UL94V-0)
	Actuator: brass, chrome plated
	Switch support: brass or steel, tin plated
	Switch support retainer: stainless steel
	Contact / terminal: copper alloy, gold over silver plated

RoHS-conform 2002/95/EC

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm	Date	Name	MZME 2 NG-PC T1 B4	
	11/07	dr		
			knitter-switch	30 12 83
Modifications	Date	Name		Page 1/1