



Part No.	Poles	A	B
SBS 1001	1	3.48	0
SBS 1002	2	6.02	2.54
SBS 1003	3	8.56	5.08
SBS 1004	4	11.10	7.62
SBS 1005	5	13.64	10.16
SBS 1006	6	16.18	12.70
SBS 1007	7	18.72	15.24
SBS 1008	8	21.26	17.78
SBS 1009	9	23.80	20.32
SBS 1010	10	26.34	22.86
SBS 1012	12	31.42	27.94

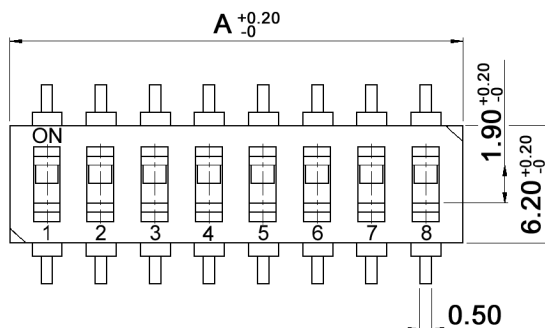


Specifications:

- Contact rating:** 25mA, 24V DC / 100mA, 6V DC
min.: 0.1mA, 3V DC
- Contact resistance:** 50mOhm max.
- Insulation resistance:** 100MOhm min. at 500V DC
- Dielectric strength:** 500V, 50Hz for the duration of 1 minute
- Operating temperature:** -40°C to +85°C
- Storage temperature:** -40°C to +85°C
- Mechanical life:** min. 2 000 cycles
- Operating force:** 10N max.
- Slide position:** off (excepted SBS 1004 T-IS: pos. 3 is ON; pos. 1,2,4 is OFF)
- Vibration:** MIL-STD 202F, method 201A
- Shock:** MIL-STD 202F, method 213B, condition A
- Construction:** case sealed, slides recessed, front sealed with protective tape
- Mounting:** on pc-board - SMD
- Material:** PPS meets UL94V-0
- Terminal:** gold flush over nickel 30-100u"
- Contact:** gold plated 3u" over nickel 30-100u"

P.C.B. LAYOUT

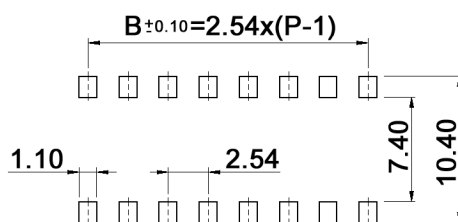

Soldering conditions:

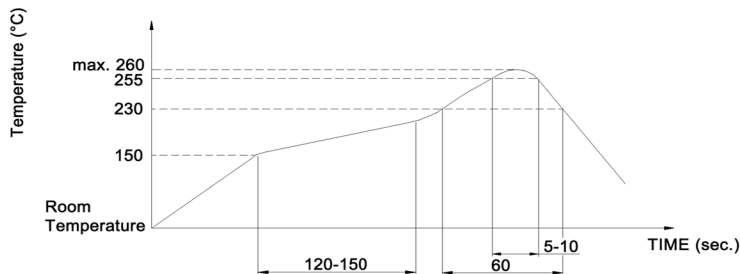

Tolerances:			Date	Name	<h1>SBS 1000</h1>
			03/05	dr	
SBS 1001 added	01/12	dr			
Delivery position	10/10	dr			
Vibration / shock	06/10	dr			<h1>30 05 91</h1>
Specifications	03/09	dr			
Operating force	01/07	dr	knitter-switch		Page
RoHS compliant	08/05	dr			1/1
Modifications	Date	Name			