



P.C.B. LAYOUT

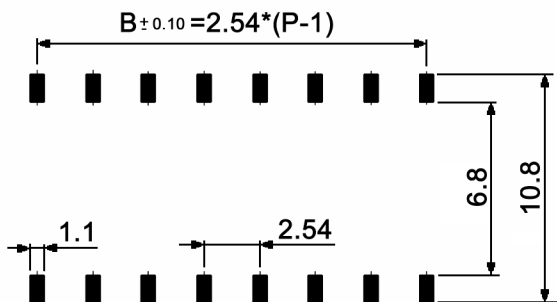

SCHEMATIC (TYP.)



(1,2,3,4,5,6,7,8,9,10,12, POS AVAIL)

Prod. No.	No. of pos.	A	B
SBS 5001 TG	1	2.44	-
SBS 5002 TG	2	4.98	2.54
SBS 5003 TG	3	7.52	5.08
SBS 5004 TG	4	10.06	7.62
SBS 5005 TG	5	12.60	10.16
SBS 5006 TG	6	15.14	12.70
SBS 5007 TG	7	17.68	15.24
SBS 5008 TG	8	20.22	17.78
SBS 5009 TG	9	22.76	20.32
SBS 5010 TG	10	25.30	22.86
SBS 5012 TG	12	30.38	27.94



Tolerances: max. ±0.2mm	Date	Name
	07/10	dr
Specifications	05/11	dr
Modifications	Date	Name

SBS 5000 TG

30 21 46

knitter-switch

Page

1/2

Specifications:

Contact rating: non-switching: 100mA, 50V DC
switching: 25mA, 24V DC
min.: 20mV AC/DC at 1µA

Contact resistance: 100mOhm max.

Insulation resistance: 100MOhm min. at 500V DC for 1 minute +/-5sec.

Dielectric strength: 500V AC (50/60Hz) for 1 minute

Shock resistance: MIL STD 202F, method 213B, cond. A,
contact interruption <10µsec.

Vibration resistance: MIL STD 202F, method 204, cond. C,
contact interruption <10µsec.

Operating temperature: -40°C to +85°C


Storage temperature: -40°C to +85°C

Mechanical life: 5 000 cycles

Operating force: 1 000gf max.

Material: Cover / base: high-temp. thermoplastic PA-9T UL94V-0,
molded black
Contact: copper, 0.3µm gold plated over 0.5µm nickel
Terminal: brass, 0.3µm gold plated over 0.5µm nickel
Actuator: thermoplastic LCP UL94V-0, molded white
Tape: kapton

Soldering conditions:

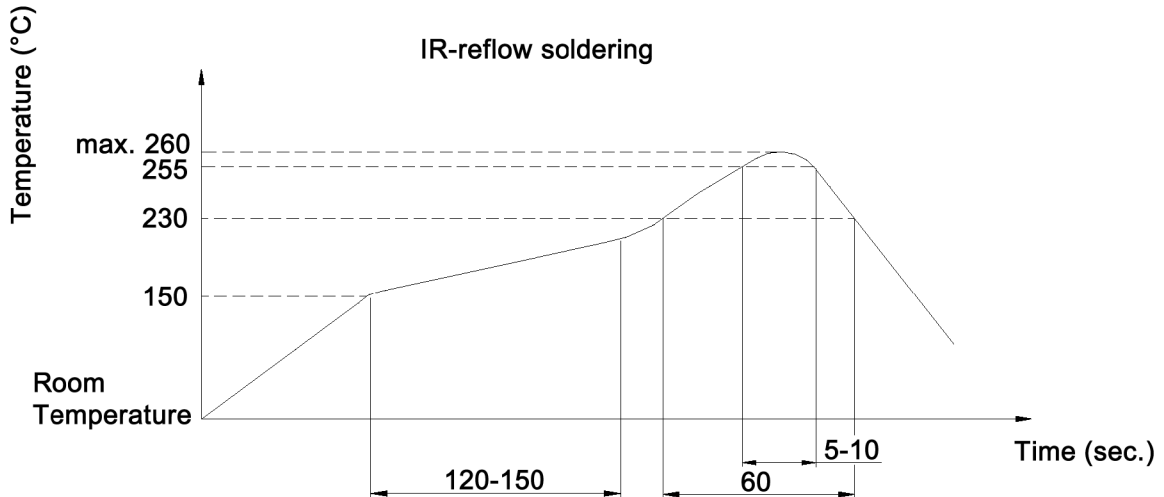

Tolerances: max. ±0.2mm			Date	Name	SBS 5000 TG
			07/10	dr	
			knitter-switch		30 21 46
					Page 2/2
Modifications	Date	Name			