

PART No.	POLE	A ±0.2
SBS 9002 JTG	2	5.52
SBS 9003 JTG	3	8.06
SBS9004 JTG	4	10.60
SBS 9005 JTG	5	13.14
SBS 9006 JTG	6	15.68
SBS 9007 JTG	7	18.22
SBS 9008 JTG	8	20.76
SBS 9009 JTG	9	23.30
SBS 9010 JTG	10	25.84
SBS 9012 JTG	12	30.92

Specifications:

Contact rating: 25mA, 24V DC
 non-switching: 100mA, 50V DC
Contact resistance: 50mOhm max.
Insulation resistance: 100MOhm min. at 500V DC
Dielectric strength: 500V DC for 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Mechanical life: 5 000 cycles
Soldering cinditions: 260°C +/-10°C (switches in OFF position)
Material: Cover / base: thermostable PPS UL94V-0, black
 Actuator: PA46 UL94V-0, white
 Terminal: brass, 3µ" gold plated
 Movable contact: copper alloy, 3µ" gold plated



Tolerances:			Date	Name
			05/06	dr
Actuator	03/09	dr		
Modifications	Date	Name		

SBS 9000 JTG


knitter-switch

30 09 01

Page

1/2

SOLDERING PROFILE:

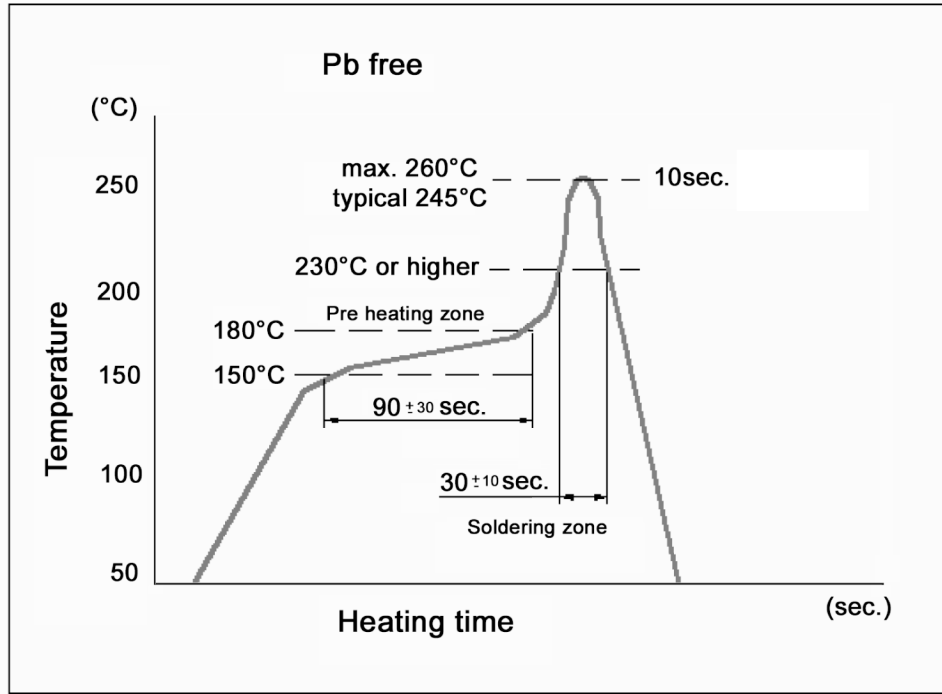

Tolerances:			Date	Name	SBS 9000 JTG
			05/06	dr	
			knitter-switch		30 09 01
					Page
					2/2
Modifications	Date	Name			