

P.C.B. LAYOUT



Specifications:

- Contact rating: 25mA, 24V DC
- Non-switching rating: 100mA, 50V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V DC for 1 minute
- Mechanical life: 5 000 cycles
- Resistance to soldering heat: 260°C +/-10°C (switches in OFF position)
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C

RoHS compliant

Material:

- Case: black, washable (by polyimide protective tape)
- Base: black, washable
- Actuator: PA46 UL94V-0, white
- Terminal contact: brass, tin plated
- Movable contact: copper alloy, tin plated
- Terminal: brass, tin plated

PART No.	POLE	A ±0.2
SBS 9001 TK	1	2.98
SBS 9002 TK	2	5.52
SBS 9003 TK	3	8.06
SBS 9004 TK	4	10.60
SBS 9005 TK	5	13.14
SBS 9006 TK	6	15.68
SBS 9007 TK	7	18.22
SBS 9008 TK	8	20.76
SBS 9009 TK	9	23.30
SBS 9010 TK	10	25.84
SBS 9012 TK	12	30.92

Maßstab	Datum	Name
Oberfläche	07/05	dr
Actuator	03/09	dr
Taping spec.	01/06	dr
Temperature	01/06	dr
Non-switching rating	12/05	dr
Zust	Änderung	Datum
		Name


SBS 9000 TK

30 06 60

Blatt
1/3






knitter-switch

SOLDERING PROFILE:

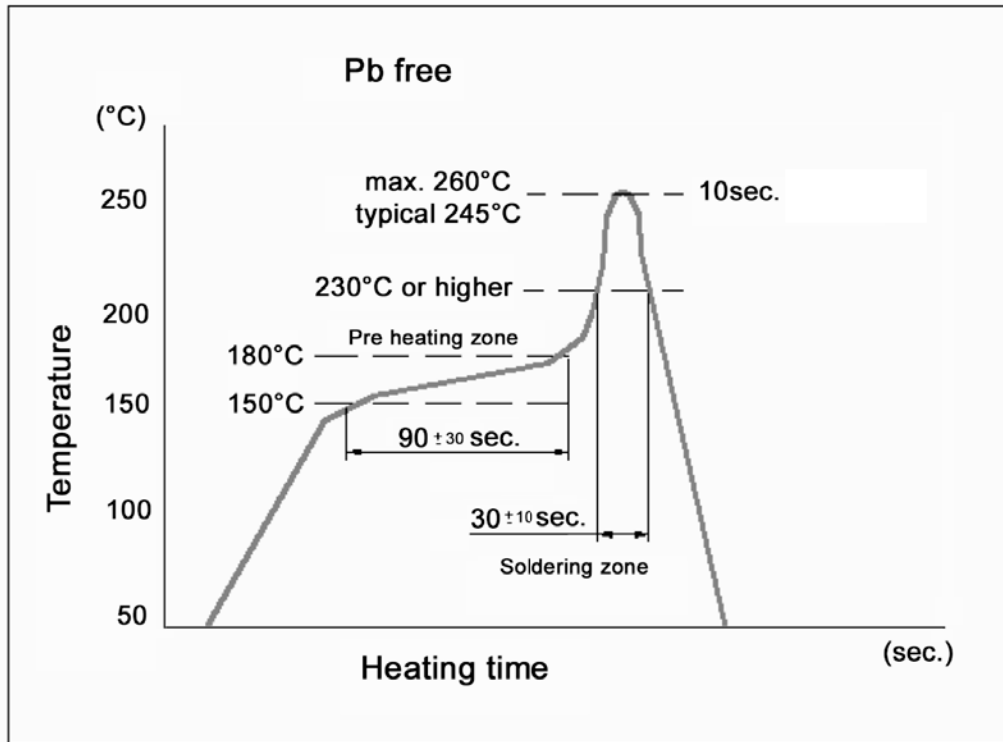

Maßstab		Datum	Name	SBS 9000 TK
Oberfläche		07/05	dr	
				30 06 60
			knitter-switch	Blatt
				2/3
Zust	Änderung	Datum	Name	

Taping specification:

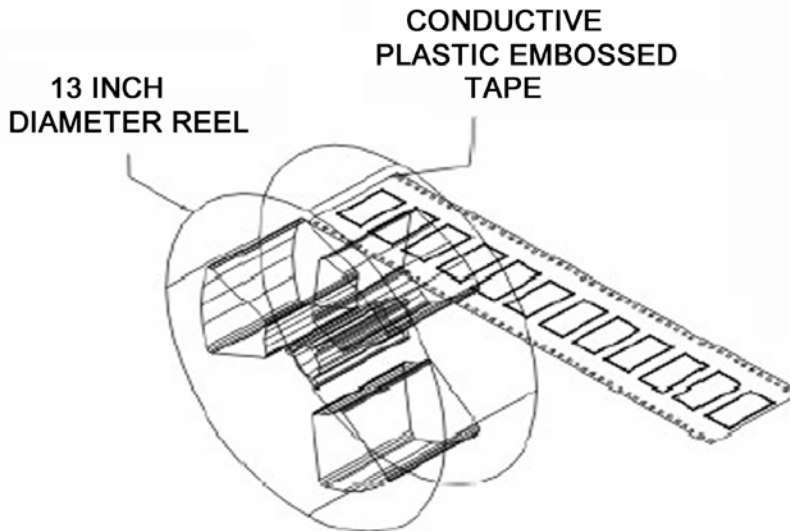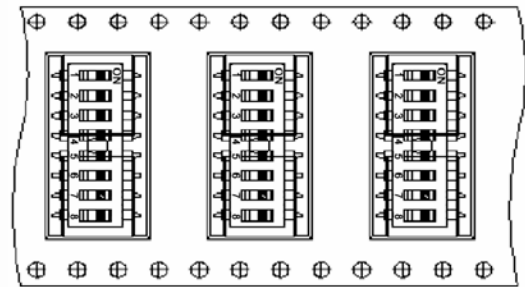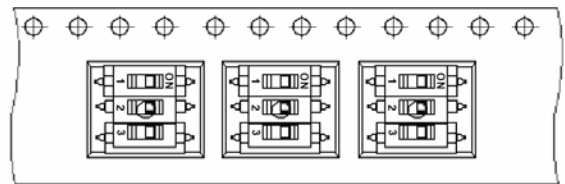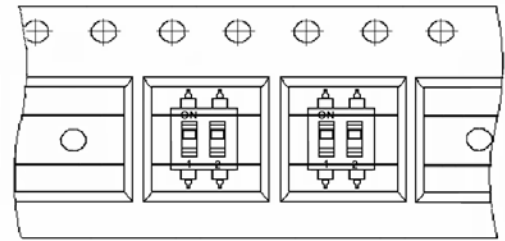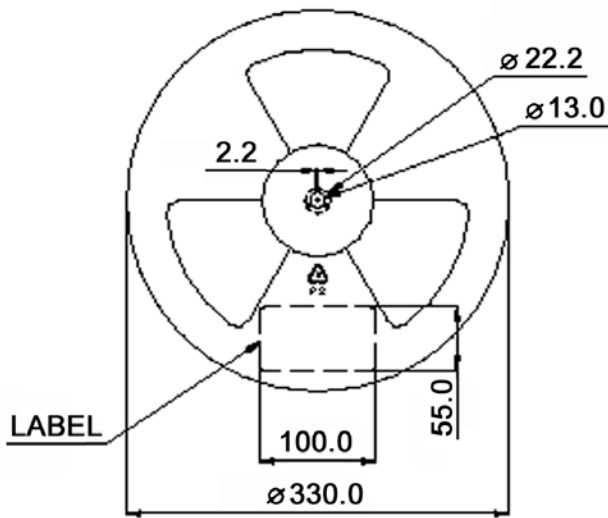

Part No.	Pcs. per reel	Carrier pitch	Carrier width
SBS 9002 TK	2000	8	16
SBS 9003 TK	1000	16	16
SBS 9004 TK	1000	16	24
SBS 9005 TK	1000	16	24
SBS 9006 TK	1000	16	24
SBS 9007 TK	1000	16	32
SBS 9008 TK	1000	16	32
SBS 9009 TK	1000	16	44
SBS 9010 TK	1000	16	44
SBS 9012 TK	1000	16	44

Maßstab	Datum	Name	
Oberfläche	07/05	dr	
Zust	Änderung	Datum	Name

SBS 9000 TK

30 06 60

Blatt
3/3

knitter-switch